

# PRODUCT CATALOG


**Outdoor Tiles** 

20 MM








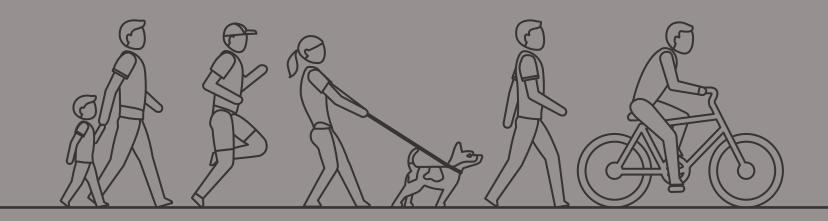

Let's walk fearless. Run like no other. Enjoy limitless.

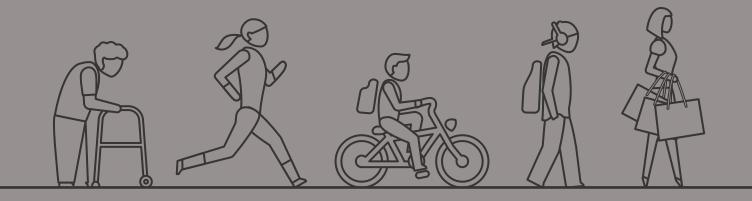

Explore you, Go beyond. Listen nature. Experience peace.

# \_Index



Explore the adventure of diverse surfaces.



5ize 600x900mm 600x600mm

Mix Patio Pack **296x600mm 296x296mm** 

Stone

**Series** 

Brasilian Pg. 27

Quarzite Pg. 31

Cotto Pg. 41

Hammer stone Pg. 36

Elite Stone Beige Pg. 45

Natural Slate Pg. 45

Rough Bruno Pg. 45

Cobble Stone Pg. 55

Country Pg. 50

Earthen Pg. 60

Core Stone Pg. 64

Blue Grey Natural Pg. 67

Basaltina Crema Pg. 75

Basalt Natural Pg. 67

Hazel Stone Pg. 71

Slate Impeio Pg. 75

Blue Stone Pg. 82

Monolith Pg. 87

Pacific Pg. 71

#### Size 600x900m 600x600m

Mix Patio Pack 296x600mm 296x296mm

## Size 300x1200mm

# **Cement Series**

Aosta Pg. 97
Grave Stone Pg. 99
Soul Stone Pg. 103
Clay Pg. 105
Sand Stone Pg. 107

Pave Stone Pg. 109

Cementino Pg. 94

# **Wood Series**

Cherry Wood Pg. 113
Oak Wood Pg. 117
Pine Pg. 121
Roverwood Pg. 123

# 80x 80cm

Cementino Pg. 128

Country Pg. 132

Brasilian Pg. 135


Earthen Pg. 138

Blue Stone Pg. 141

# THE SURFACE TO TOUCH, WALK AND EXPERIENCE.

# **01\_ Preface**



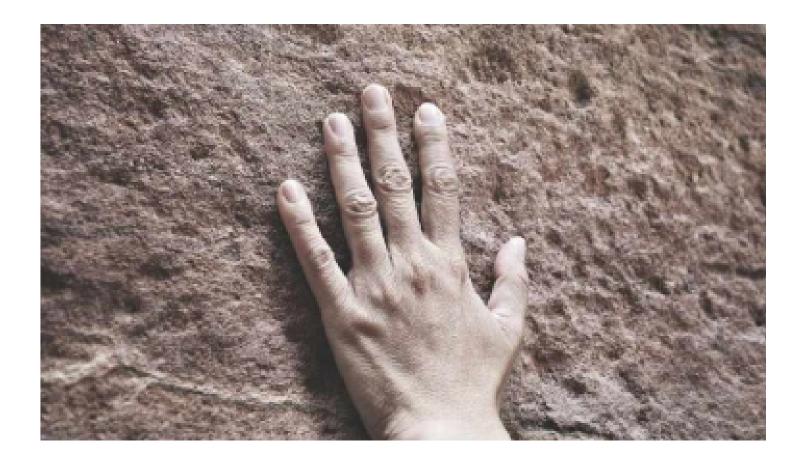

# 20mm - OUTDOOR PORCELAIN

For those who believe in Nature and value craftsmanship. When you step outdoor to start your day, Our gives you the warmth of Nature. And, at the end of the day, when you walk back home, once again experience the rejuvenation of Mother Nature beckoning you.





# **EXTREME STRENGTH -A REVOLUTION IN OUTDOOR SURFACES**

Our offers a mindboggling range of products in 20 mm thickness with wide range of sizes Our portfolio promises elegance, reliability and robustness in external floorings to withstand rough usage and regular wear and tear. Deliberately done, highly random designs add a natural rustic look to the range. Our wide range of products offers unlimited options for all outdoor living spaces.

All Our tiles are made of 100% porcelain and have WA of less than 0.5% that enables our products to withstand high levels of temperature variations. Higher break threshold in 20 mm tiles enhances its capability to withstand heavier loads. These characteristics make Our tiles one of the best options for outdoor paving over Sandstone and Limestone.

30x120cm

-60x90cm

800x 80x80cm 600x -60x60cm 296x 600mm 29.6x

296x 296mm \_ 29.6x

Mix Patio Pack



Our tile are the result of the and technology-enabled performance. This makes us an ideal partner for an architectural project anywhere in the world that requires unparalleled designs and performance.











# 03\_ Applications



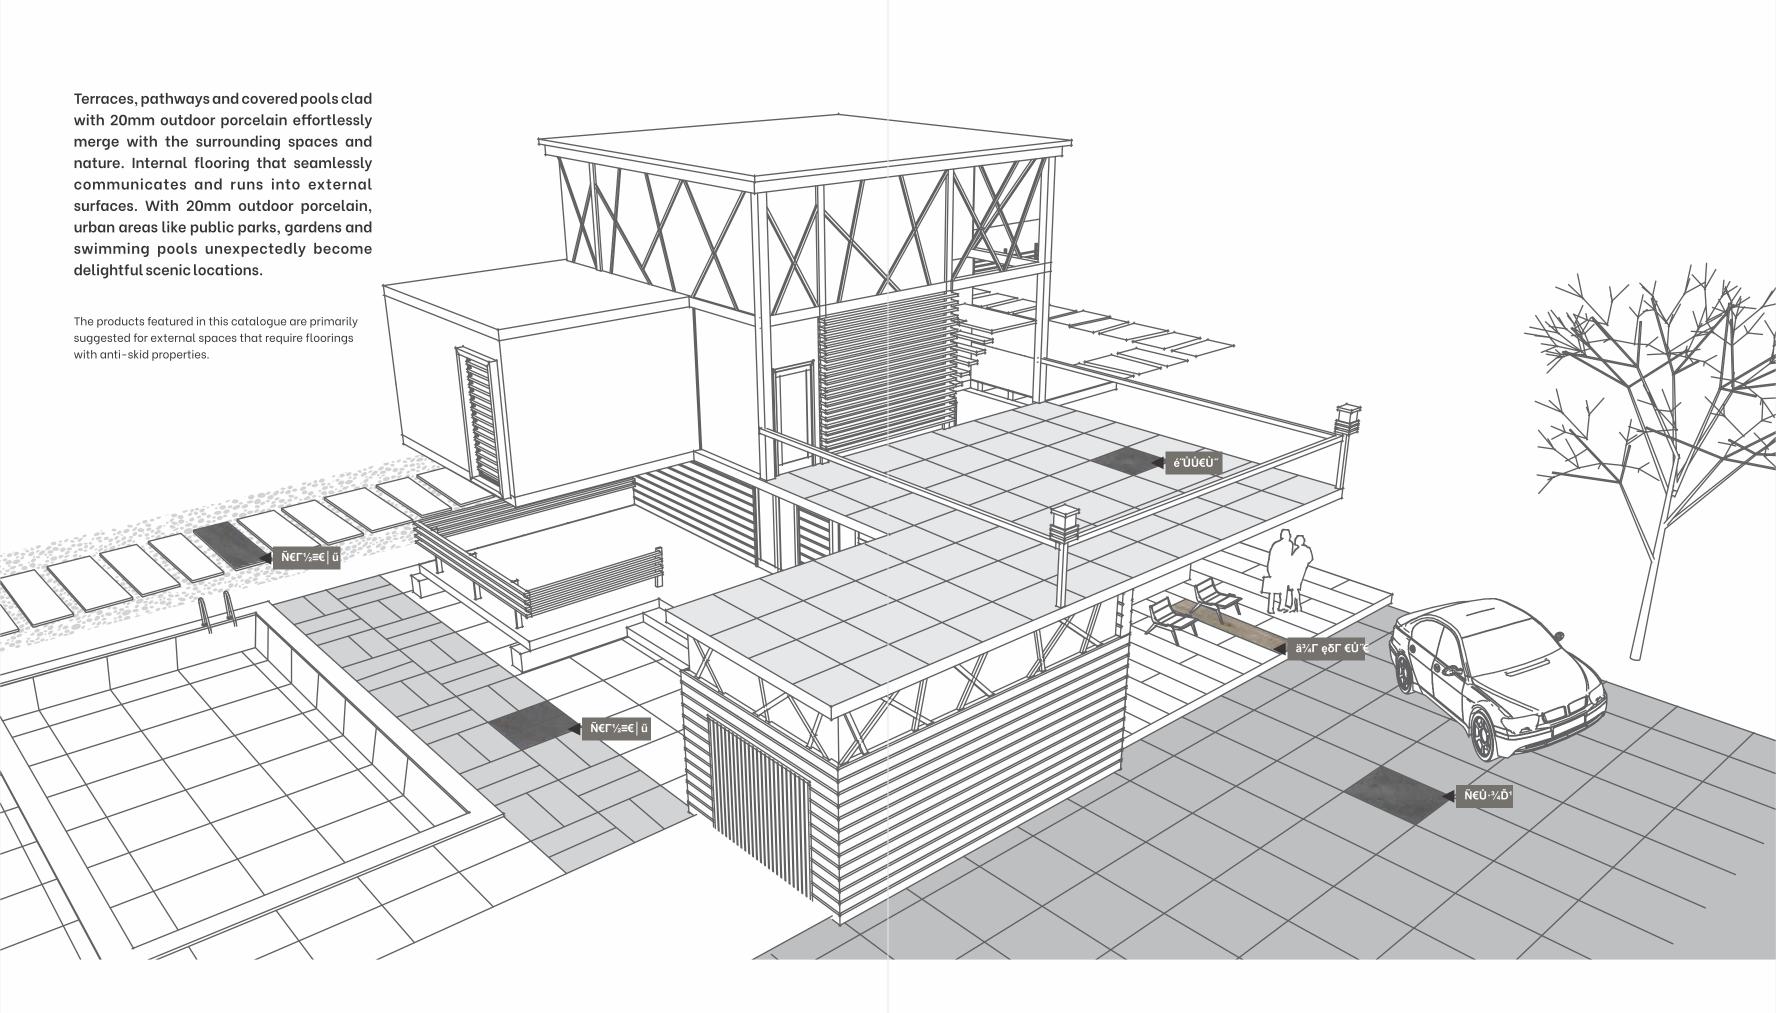

# 06\_ Laying Methods



## **DRY LAYING ON GRASS**

On a grassy surface, installation is carried out by dry laying the slabs over grass without any adhesives.


## INSTALLATION OVER GRASS COULD BE DONE IN TWO WAYS:

#### 1\_ ON GRAVEL BASE


- ¬ Remove the grass underneath the 20 mm tile.
- ¬ Dig for a depth of upto 5 cm during warm and dry climate or deeper during cold and wet seasons
- ¬ Compact the soil which will come under the tile.
- ¬ Fill the excavated area with gravel (sized 4-8 mm) or sand and compact it.
- ¬ Lav the dry 20 mm tile over this prepared area.

#### 2 DIRECT

Place the tile on grass ensuring that a wide gap of 4-5 cm is left between two tiles for fresh grass to grow. In the Direct route too, the results are long-lasting, but the tile stability is subjected to soil conditions and movements.

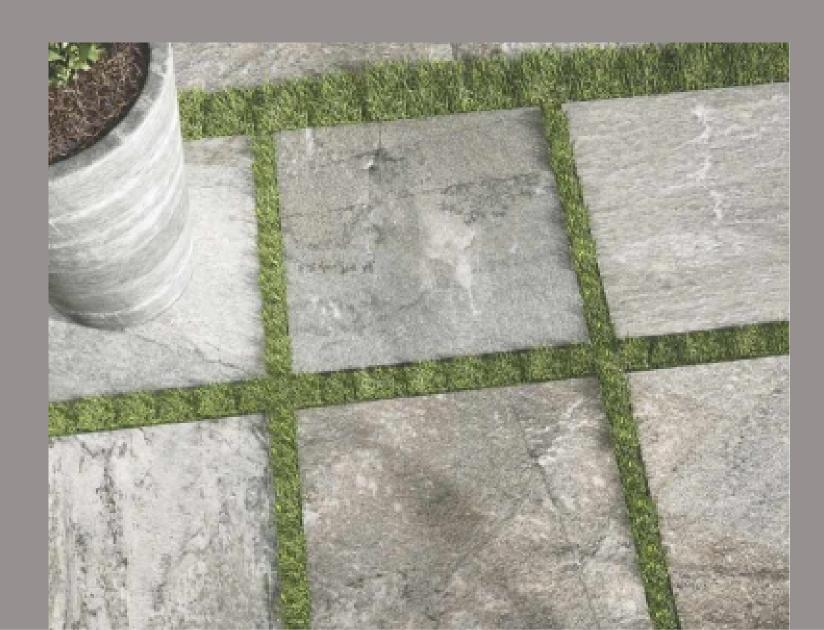





# LAYING ON SCREED WITH ADHESIVE

20 mm Outdoor Porcelain Our tile can be fixed over screed to create floor with high technical performance. Such surfaces are suitable for use in exceptionally high stress applications like vehicular traffic etc.

#### **HOW TO INSTALL ON SCREED**

- ¬ Dig up the soil and compact the ground over which tiles will be laid
- ¬ Place a layer of crushed stones and gravel as base.
- ¬ Place the slab including optional steel mesh.
- ¬ Install the 20 mm tile with the help of exterior grade elastic adhesive.

Leave a gap of atleast 2 mm at every joint to provide for expansion.




The 20 mm tile is a multi-functional solution capable of adapting to the ground. Besides, allowing the development of large surfaces over gravel, it also reduces the occurrence of joints making the surface appear seamless.


#### **HOW TO INSTALL**


- Dig the soil atleast for 10 cm during warm and dry weather or deeper in cold or wet climate.
- Compact the soil at the base and ensure that it is leaning (>=2%) to avoid stagnation of water.
- Dotional Place a layer of geotextile for additional strength
- ¬ Place a layer of crushed stone and gravel (size 4-8 mm) and compact it well.
- ¬ Place a layer of fine gravel or sand (size 2-5 mm) to achieve a fairly levelled surface.
- With a Straight-Edge, ensure that that the surface is levelled correctly. A minor gradient (>= 1%) is recommended to achieve proper drainage of water.
- ¬ On this surface, place 20 mm tiles leaving a gap of 2 mm at joints for expansion.

Tile spacers could also be used to ease installation. Level the surface with a Straight Edge and use a rubber hammer to rectify the minor height differences, if any.

Fill the joints with very thin layer of sand (Size 0-3 mm) or polymeric sand.

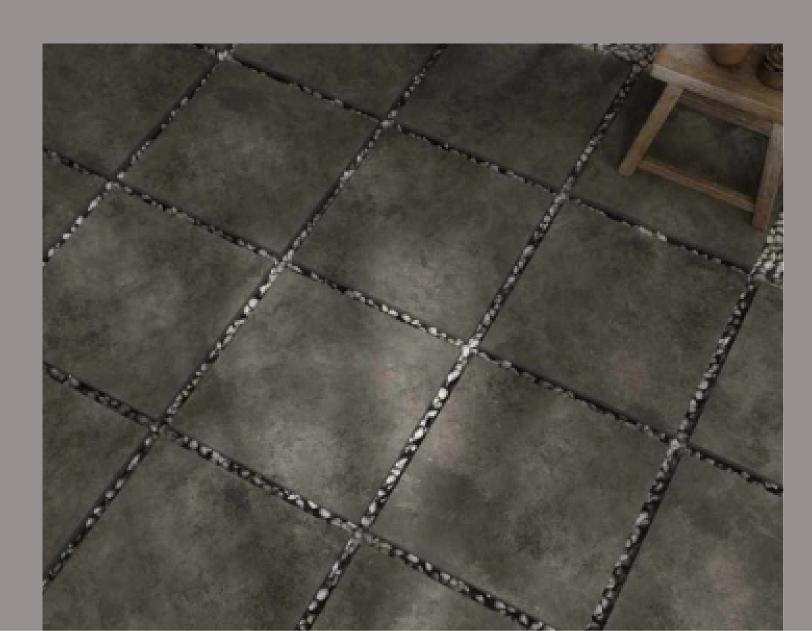


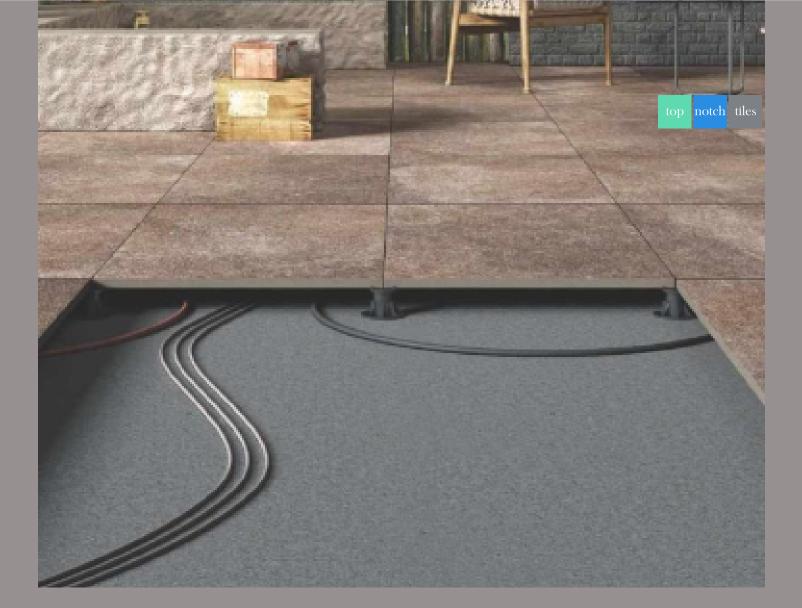



# **OUTDOOR LAYING ON RAISED FLOORING**

On terraces or accessible attics, it is possible to build raised level flooring that even allows for rainwater drainage. After the slab and its sloping screed are complete, install the waterproofing membrane. Position the pedestal according to the desired size and use the slope corrector, if necessary. During the installation process, correctly adjust each pedestal to achieve a smooth flat floor.



# **DRY LAYING ON SAND**

It is possible to easily create walkways and installations on sandy grounds with minimal effort.


## INSTALLATION ON SAND CAN BE DONE IN TWO WAYS:


## 1\_ON SUBSTRATE, ALLOWING THE STABILITY TO IMPROVE GRADUALLY.

- Dig about 20 cm in the sandy ground.

#### 2\_ DIRECTLY

- Level and compact the sane beneath.Dry laying the 20 mm tile.

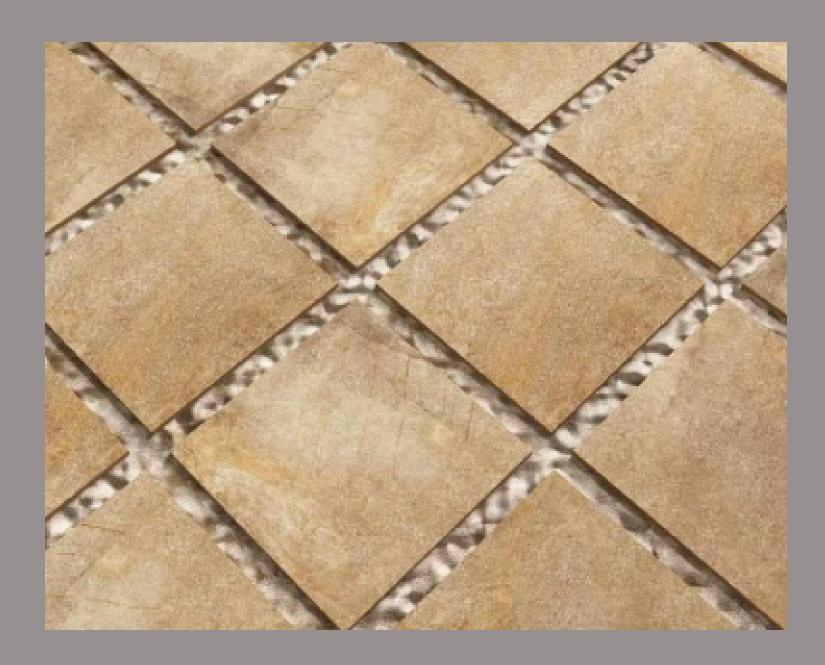

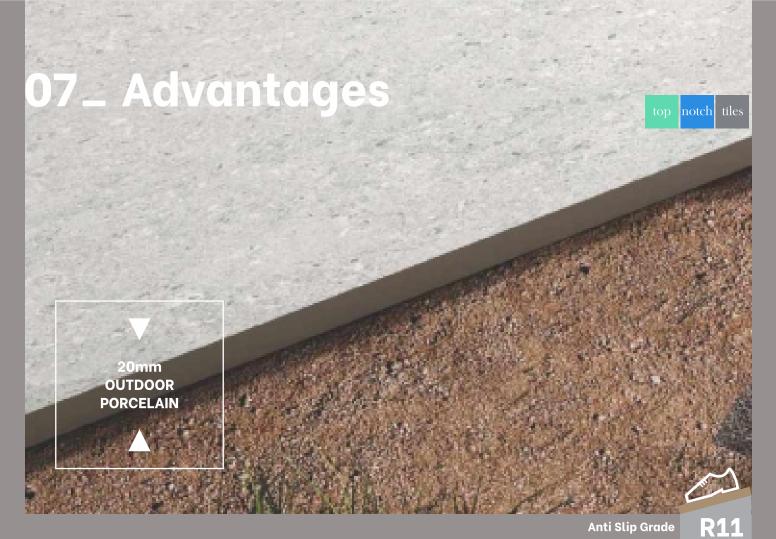

tile guarantee its durability and resistance to chemicals and atmospheric elements coupled with the flexibility of wide range of finishes and special pieces which makes it ideal for almost every type of application.







Resistant



Resistant







Thermo-impact





# 08\_ Laying Patterns


# **MAKE NATURAL LOOKING PATTERNS** LIKE INTERLOCKING, RANDOM, REPETITIVE, SQUARES WITH **OUR OUTDOOR PORCELAIN**

#### Tiles Combination


600x900mm, 600x600mm, 296x600mm, 296x296mm



Tiles Combination




Tiles Combination



Tiles Combination






Tiles Combination 600x900mm



Tiles Combination 600x900mm



Tiles Combination


300x1200mm



Tiles Combination 300x1200mm



Tiles Combination 300x1200mm



Please note that your stockist may offer the tiles in different pack sizes. All dimensions are standard and all products are designed to be laid with appropriate joints. Please refer to our step-by-step laying guide for additional information on this topic. Also, when using multiple tile packs, always mix the tiles before laying to achieve an overall blended appearance.


# 09\_ Application Areas




Our 20 mm thick Outdoor Porcelain vitrified tile by Our brings together aesthetically appealing quality and the best technical performance and could be used over almost all external areas and usages without the risk of breakage. They are resistant to frost and also to sudden temperature changes besides being anti-slip, easy to clean and are designed to retain their texture and colour over their lifetime.




Public Parks, Gardens



Terraces and **Balconies** 



Driveways and Pathways




Swimming Pools and Surrounding Areas



Beach Resorts



Parking Lots and Vehical Passage



Street Furniture



High-traffic Industrial Areas



Out door patio and verandah















BRASILIAN BLACK









600x900mm, Random - 19



600x600mm, Random - 38



600x600mm, Random - 38

Mix Patio Pack\_

296x 600mm
















QUARZITE NATURAL





600x900mm, Random - 14



QUARZITE NATURAL

600x900mm, Random - 14



600x600mm, Random - 14



600x600mm, Random - 14

Mix Patio Pack\_

296x 600mm
















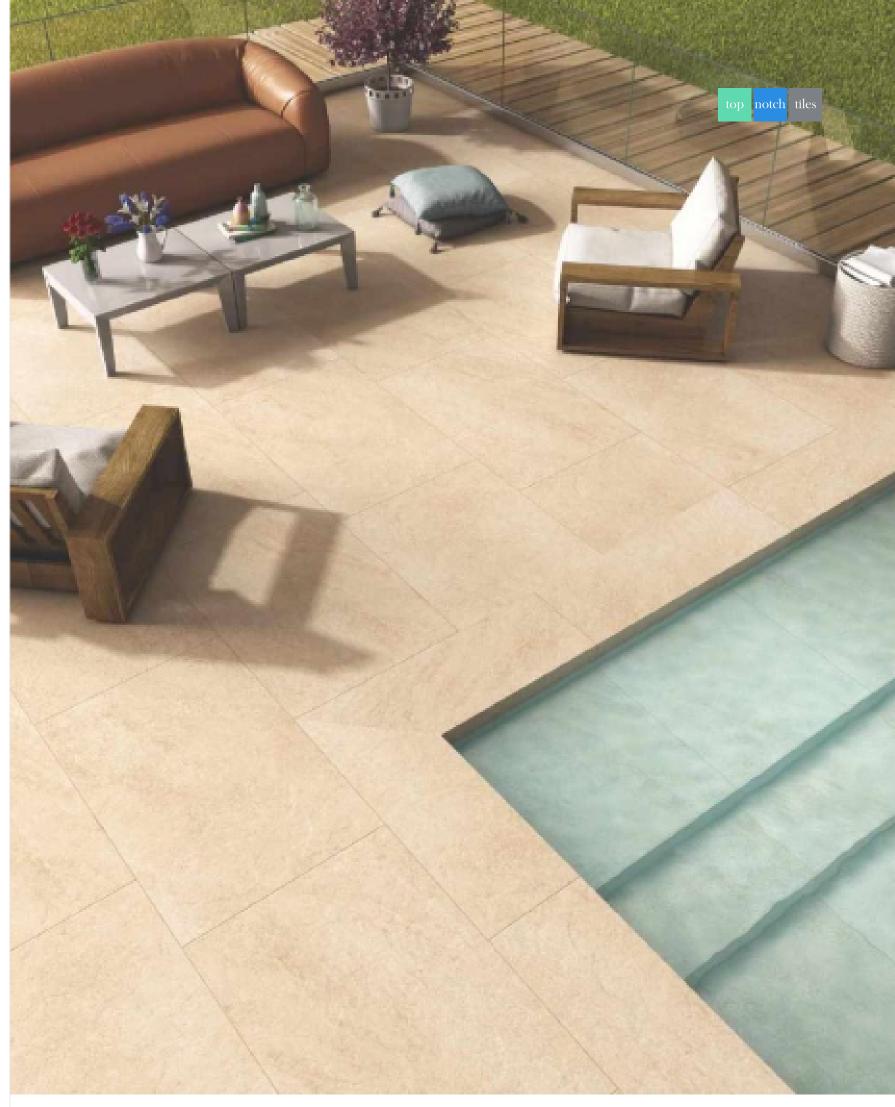


HAMMER STONE BEIGE



# top notch tiles

## H A M M E R S T O N E

## HAMMER STONE BEIGE RANDOM

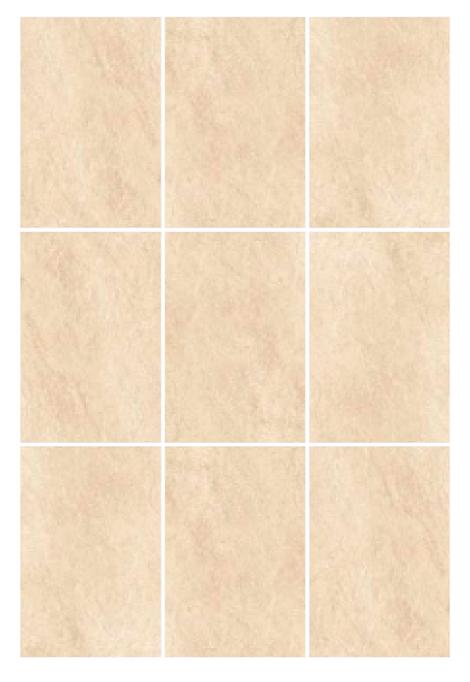

HAMMER STONE BEIGE



600x900mm, Random - 3



600x600mm, Random - 5

HAMMER STONE GREY



600x900mm, Random - 3



HAMMER STONE NERO

600x900mm, Random - 3



600x600mm, Random - 5



600x600mm, Random - 5

Mix Patio Pack\_

296x 600mm










COTTO BEIGE



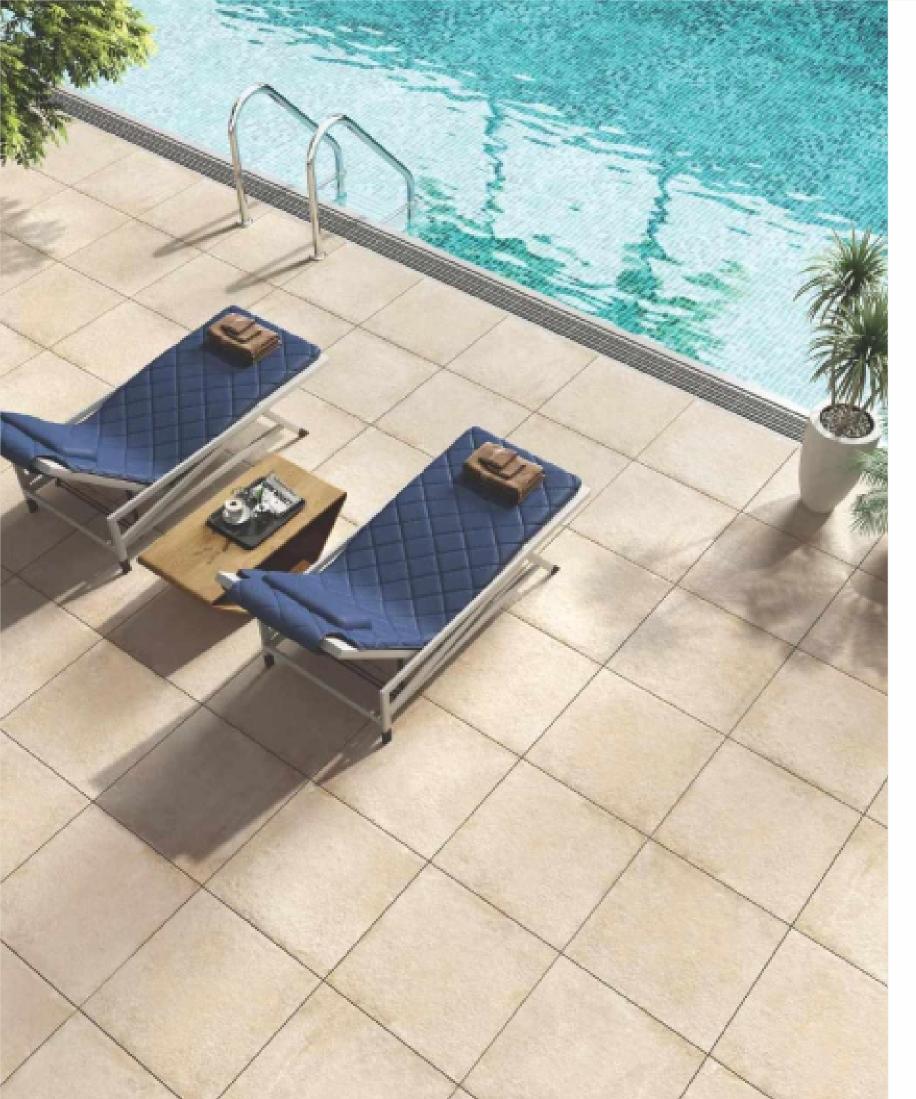







COTTO CREMA









600x600mm, Random - 5

600x900mm, Random - 4

600x600mm, Random - 5

600x900mm, Random - 4

600x600mm, Random - 5

Mix Patio Pack\_

296x 600mm









NATURAL SLATE





NATURAL SLATE



ROUGH BRUNO

600x900mm, Random - 5

600x900mm, Random - 5

600x900mm, Random - 3








600x600mm, Random - 5

600x600mm, Random - 15

600x600mm, Random - 5

Mix Patio Pack\_


296x 600mm

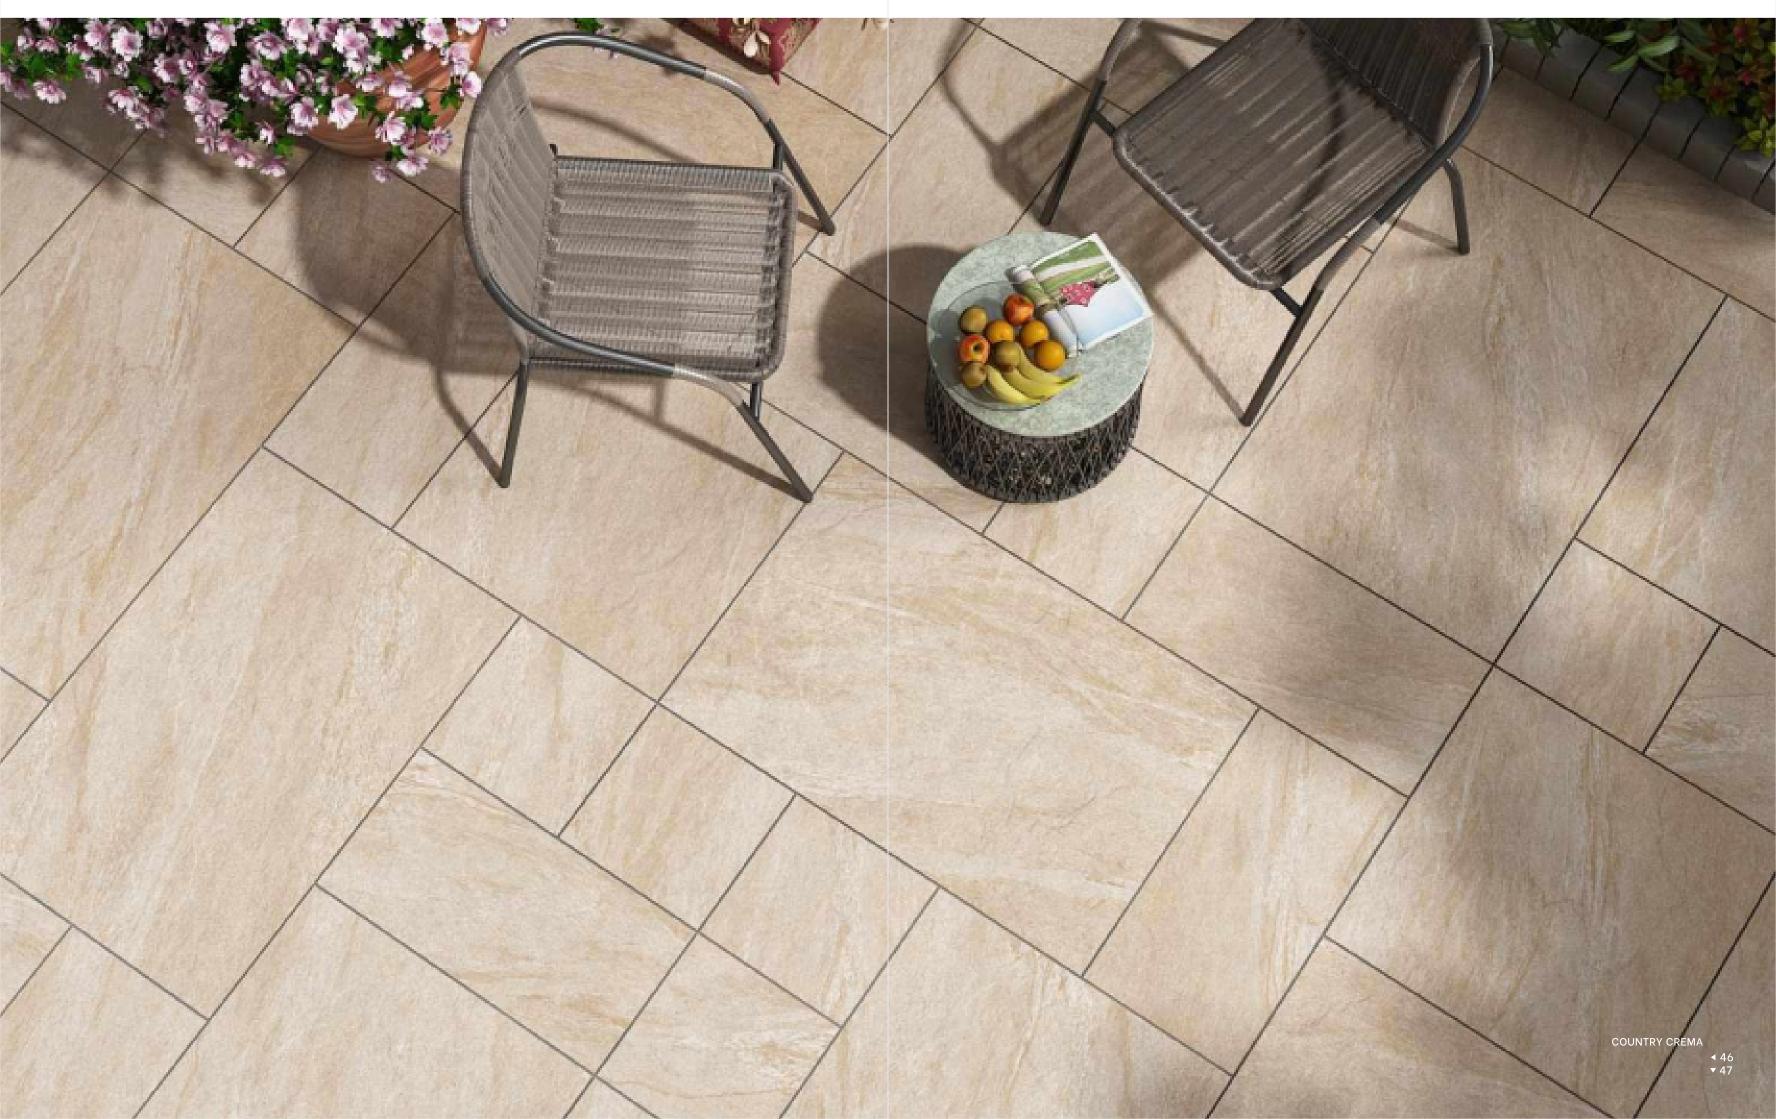








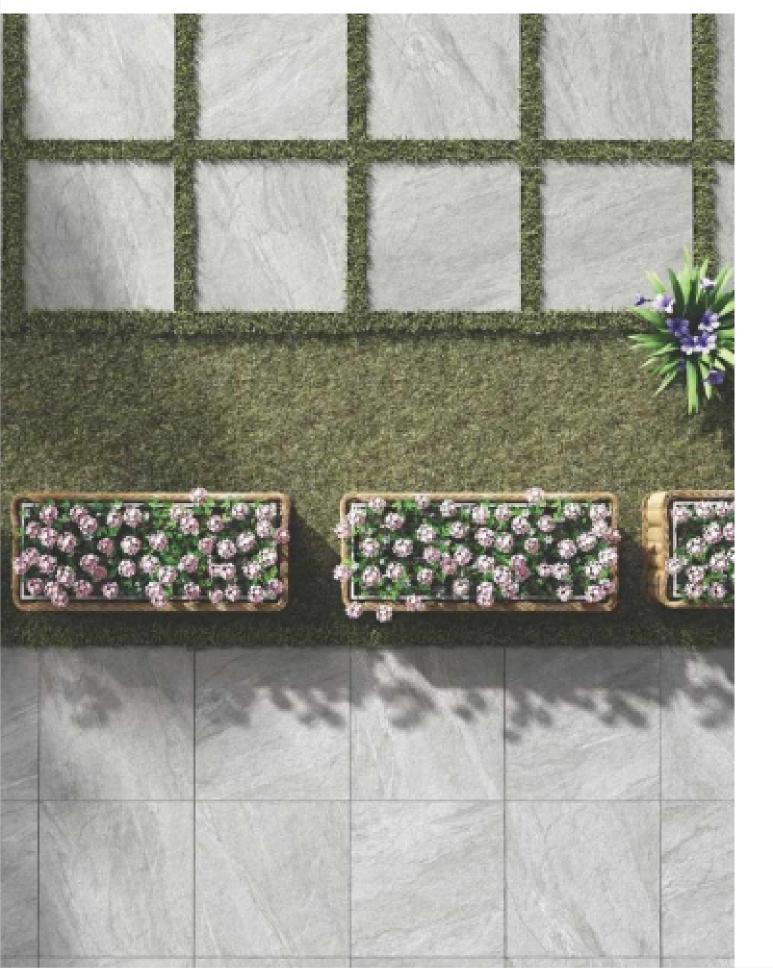

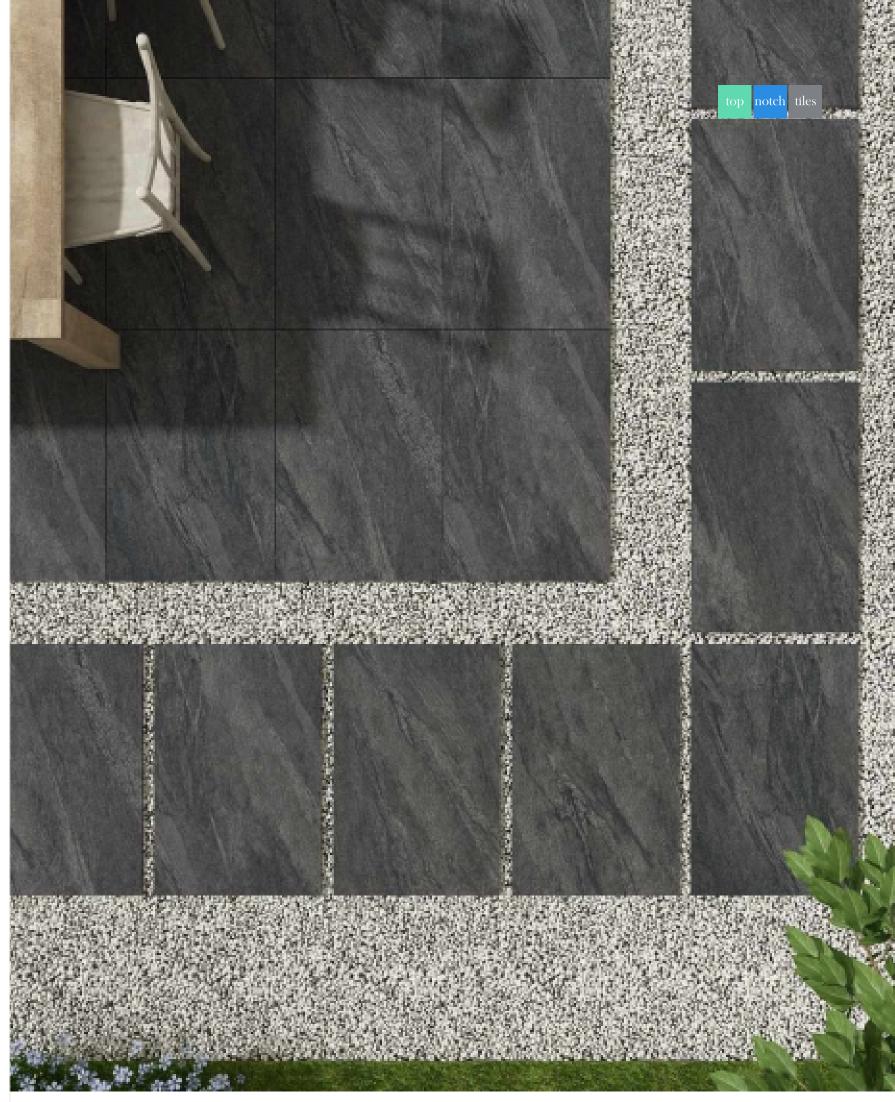

COUNTRY ANTRECITE







## COUNTRY CREMA RANDOM

C O U N T R Y



## COUNTRY CREMA



600x900mm, Random - 9



600x600mm, Random - 17

## COUNTRY LGY



600x900mm, Random - 9




COUNTRY ANTRECITE

600x900mm, Random - 9



600x600mm, Random - 17



600x600mm, Random - 17

Mix Patio Pack\_

296x 600mm







C O B B L E S T O N E



COBBLE STONE GREY




600x900mm, Random - 3

600x900mm, Random - 3

600x900mm, Random - 3







600x600mm, Random - 4




600x600mm, Random - 4

Mix Patio Pack\_

296x 600mm



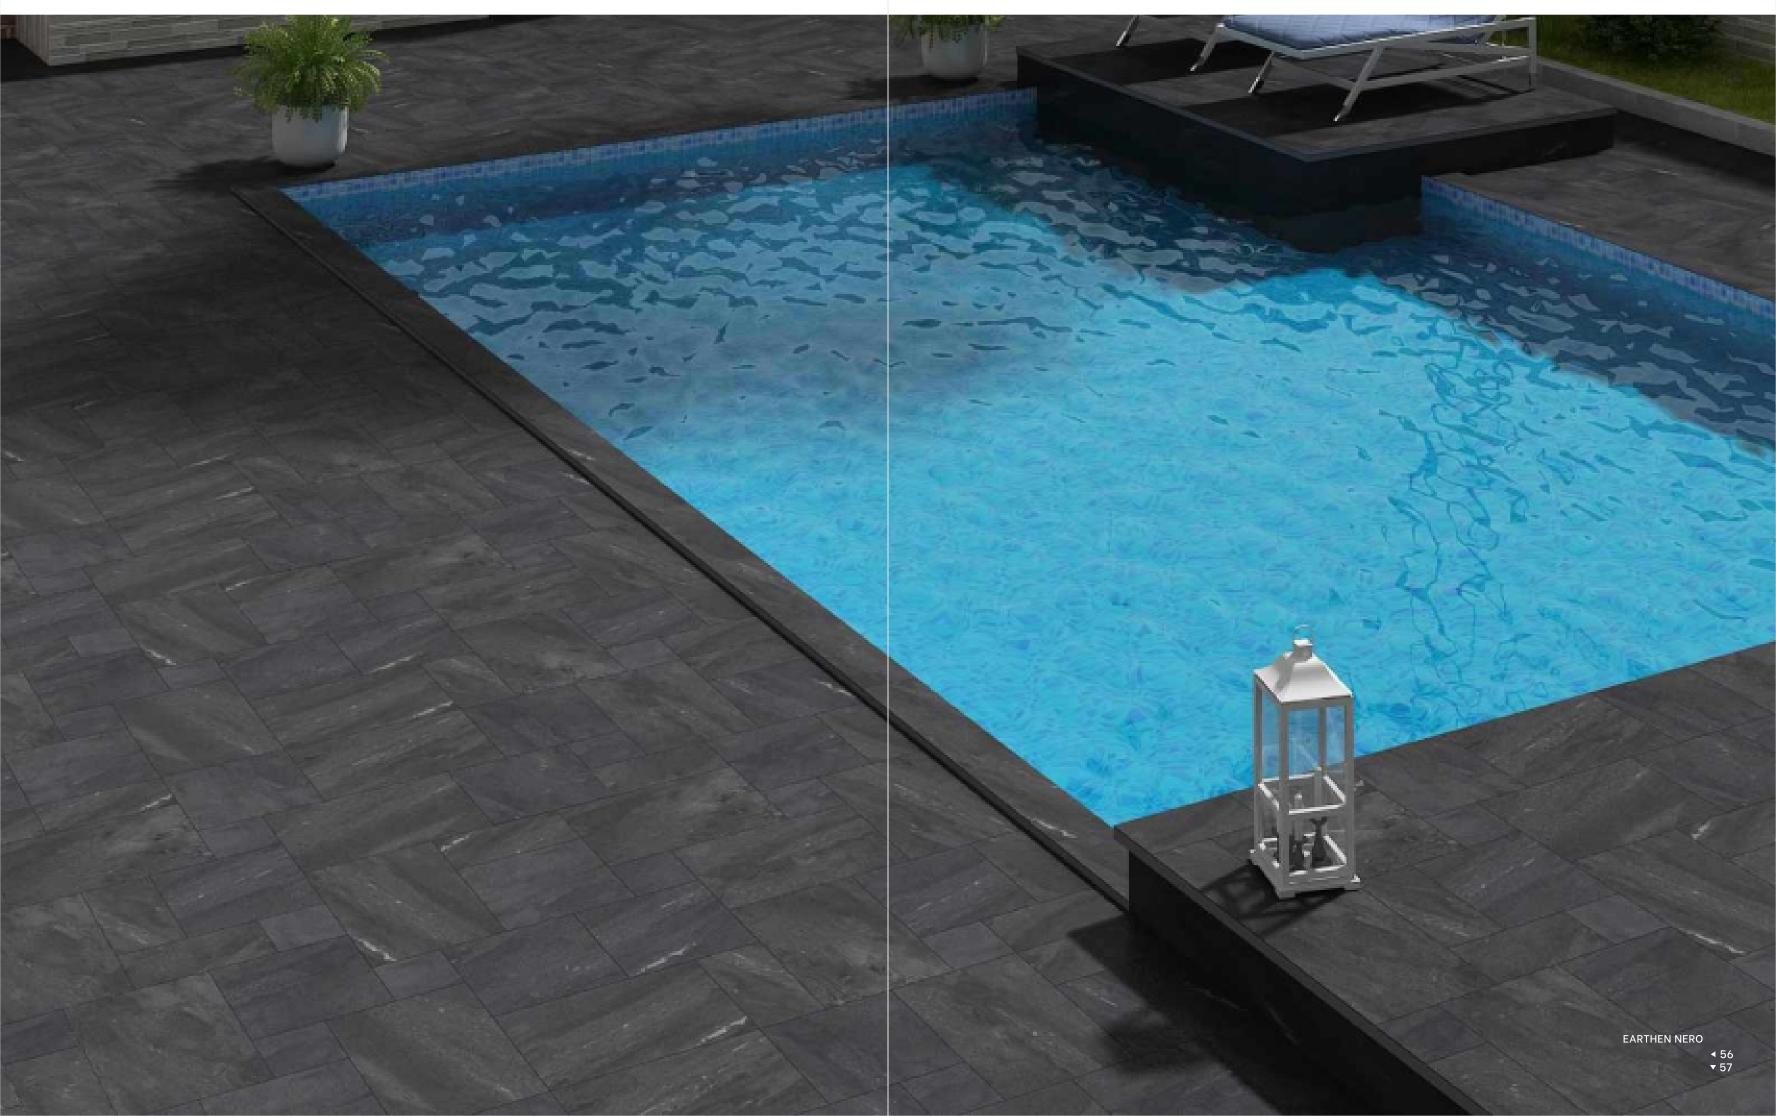






EARTHEN GREY



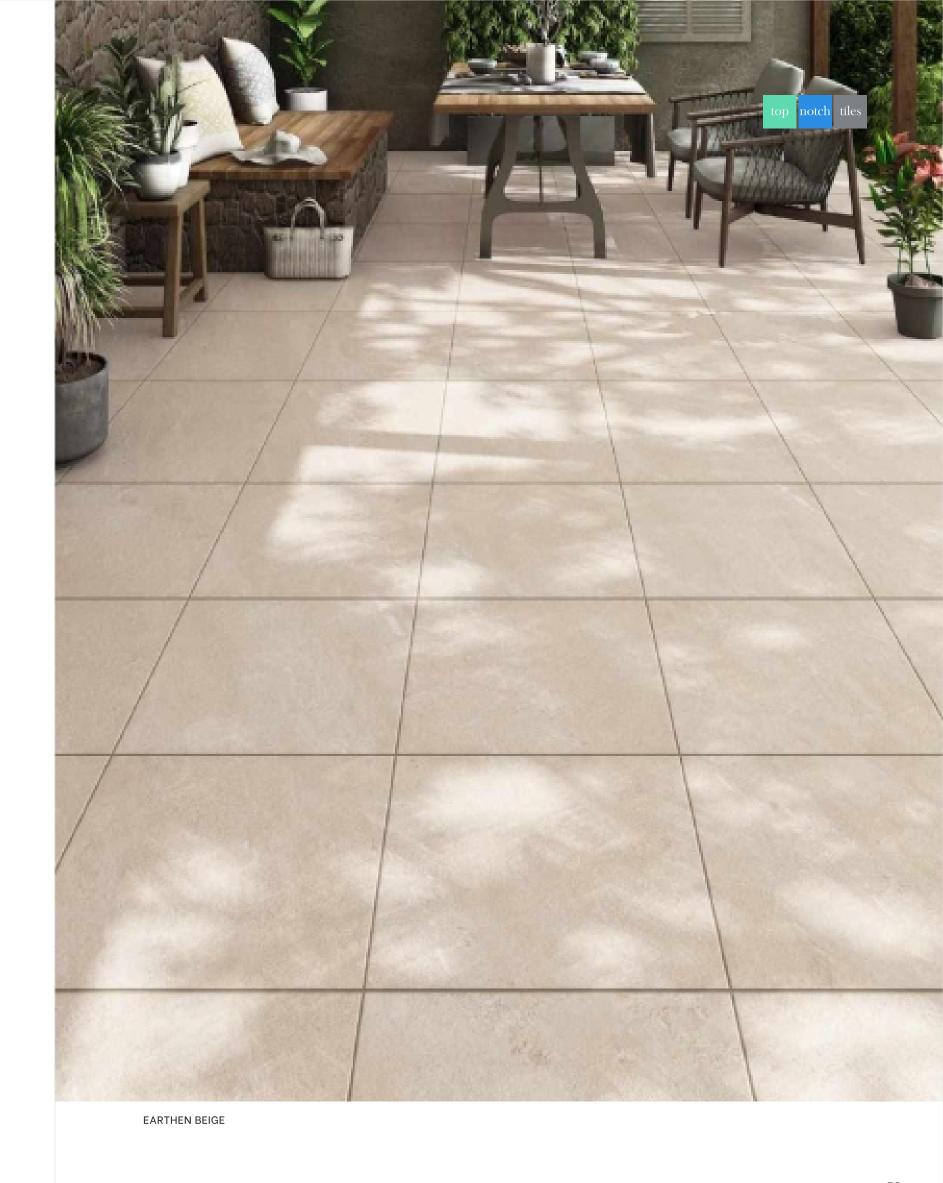



# top notch tiles

## E A R T H E N

## EARTHEN BEIGE RANDOM



EARTHEN BEIGE



600x900mm, Random - 08




600x600mm, Random - 12





600x900mm, Random - 8




600x900mm, Random - 8

EARTHEN DARK GREY




EARTHEN NERO


600x900mm, Random - 8



600x600mm, Random - 12



600x600mm, Random - 12



600x600mm, Random - 12

Mix Patio Pack\_

296x 600mm












CORE STONE NERO



# top notch tiles

## C O R E S T O N E

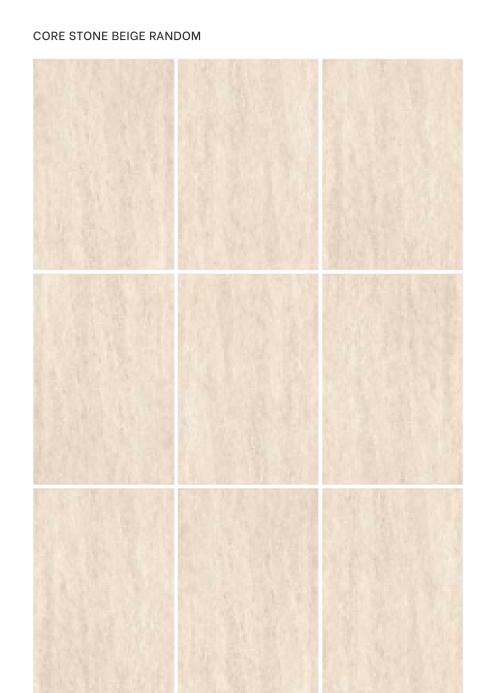

CORE STONE BEIGE

600x900mm, Random - 3





Mix Patio Pack\_

296x 600mm















BASALT NATURAL



600x900mm

600x900mm



600x600mm



600x600mm

Mix Patio Pack\_

296x 600mm











H A Z E L S T O N E



HAZEL STONE ASH





HAZEL STONE CREMA



HAZEL STONE ASH



600x900mm, Random - 2



600x900mm, Random - 2



600x600mm, Random - 3



600x600mm, Random - 3




600x600mm, Random - 3

Mix Patio Pack\_

296x 600mm



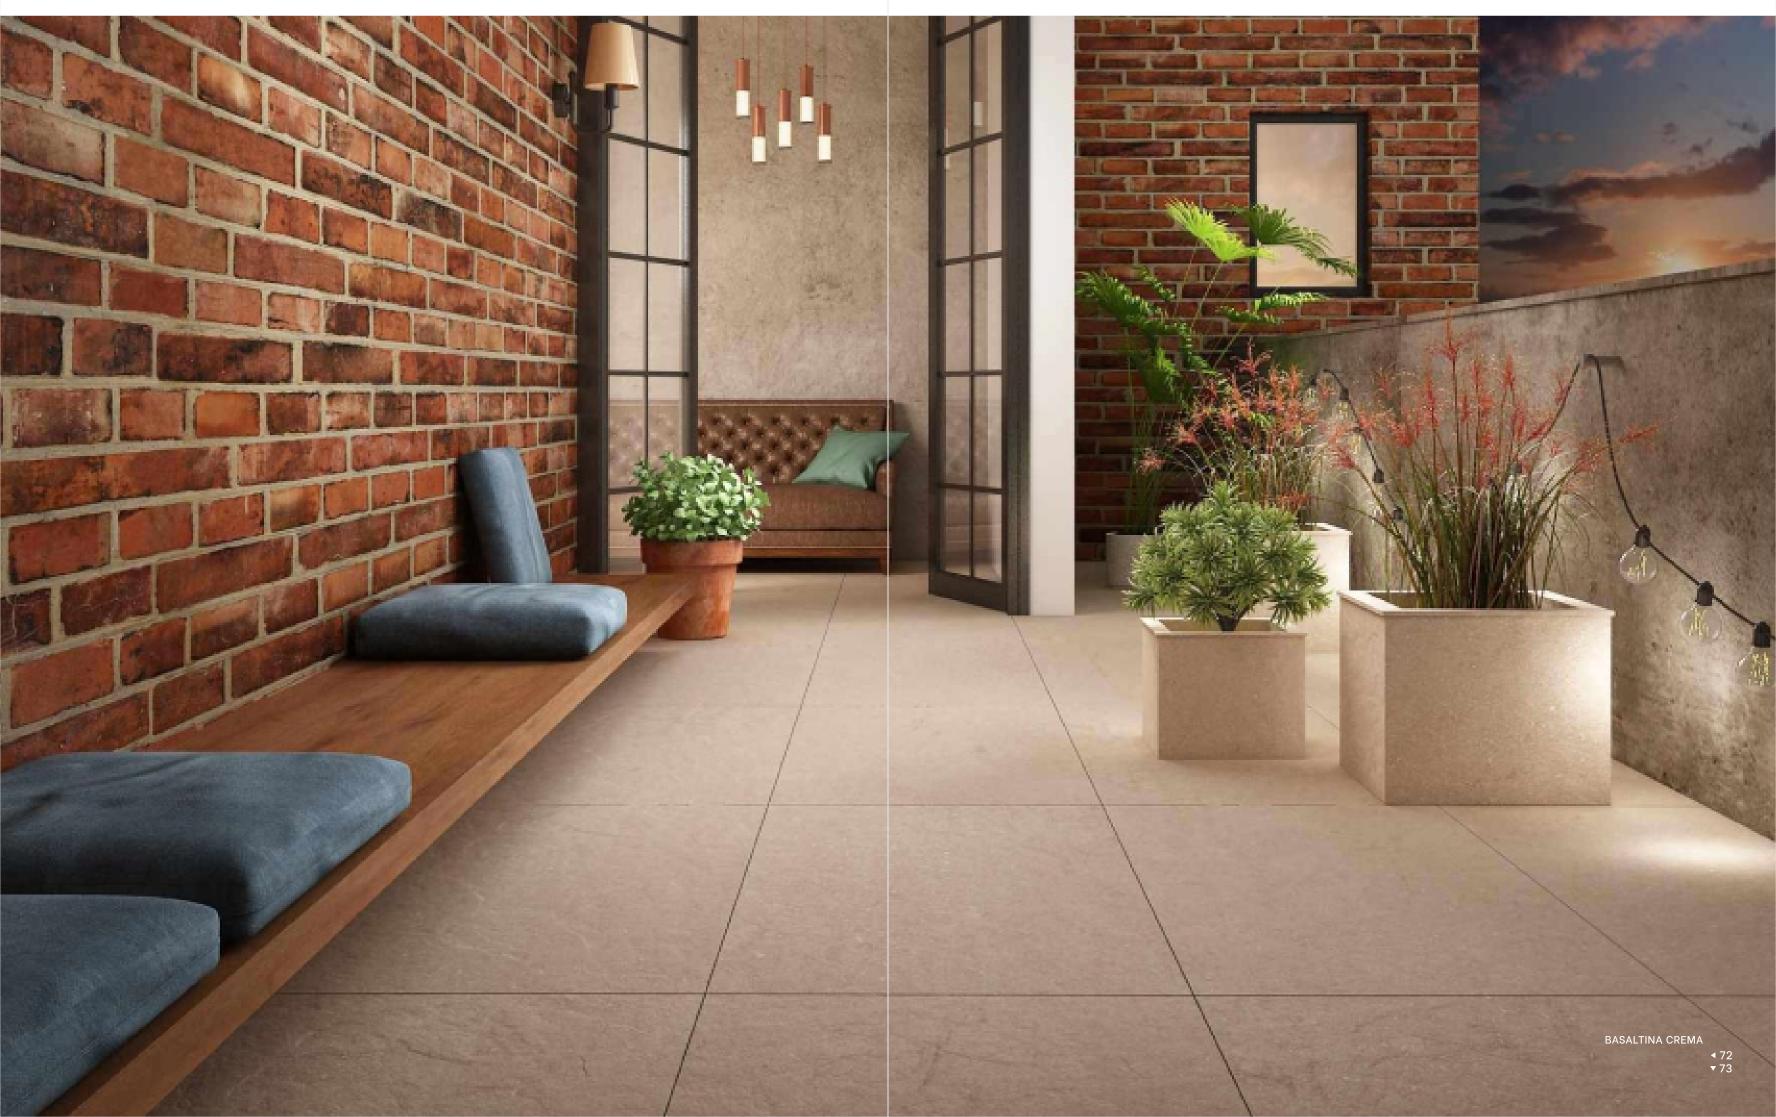













600x900mm, Random - 6

600x600mm, Random - 9 600x600mm, Random - 24



Mix Patio Pack\_

296x 600mm















PACIFIC BROWN

600x900mm, Random - 3



600x600mm, Random - 6



600x600mm, Random - 6

Mix Patio Pack\_

296x 600mm









BLUE STONE NATURAL





BLUE STONE BLACK






#### B L U E S T O N E

BLUE STONE COIN


BLUE STONE BLACK

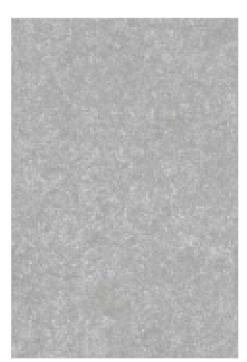



600x900mm

600x900mm







600x600mm

600x600mm, Random - 3

BLUE STONE GRIS

BLUE STONE NATURAL




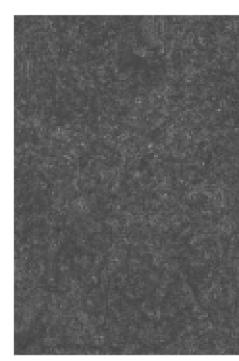

600x900mm

600x900mm





600x600mm

600x600mm

Mix Patio Pack\_

296x 600mm









MONOLITH












600x900mm, Random - 5

MONOLITH ASH




600x900mm, Random - 5



600x600mm, Random - 6



600x600mm, Random - 6





600x600mm, Random - 6

Mix Patio Pack\_


296x 600mm



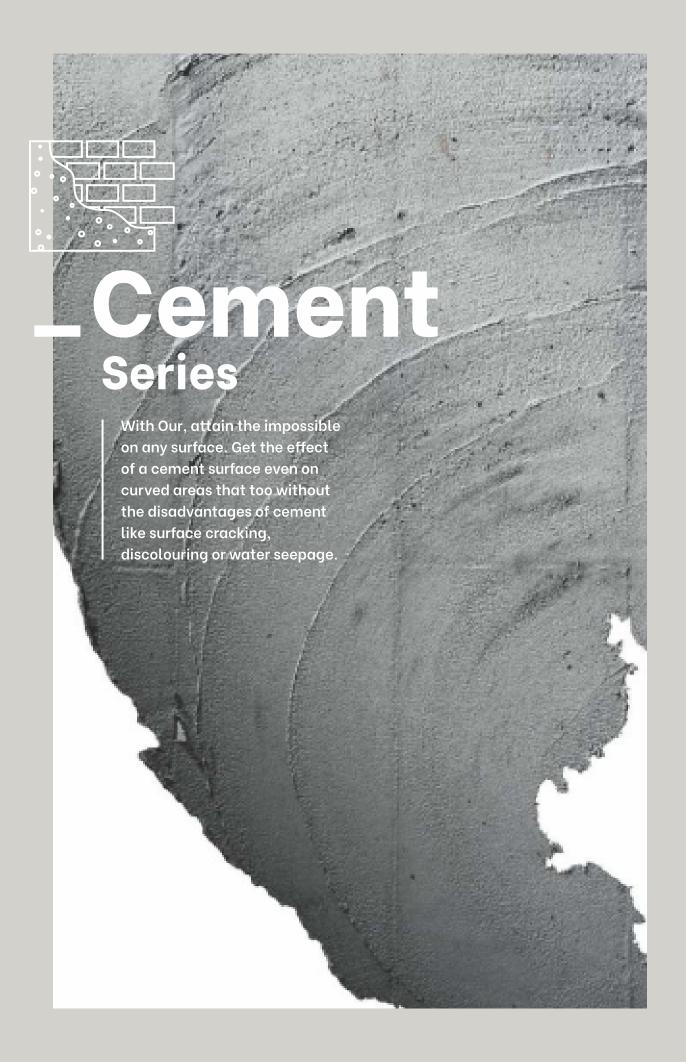

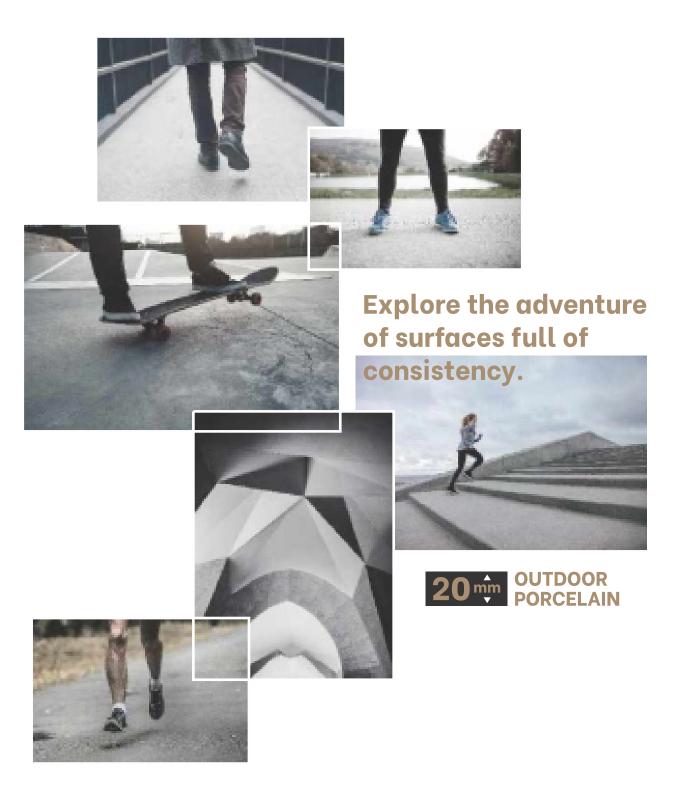



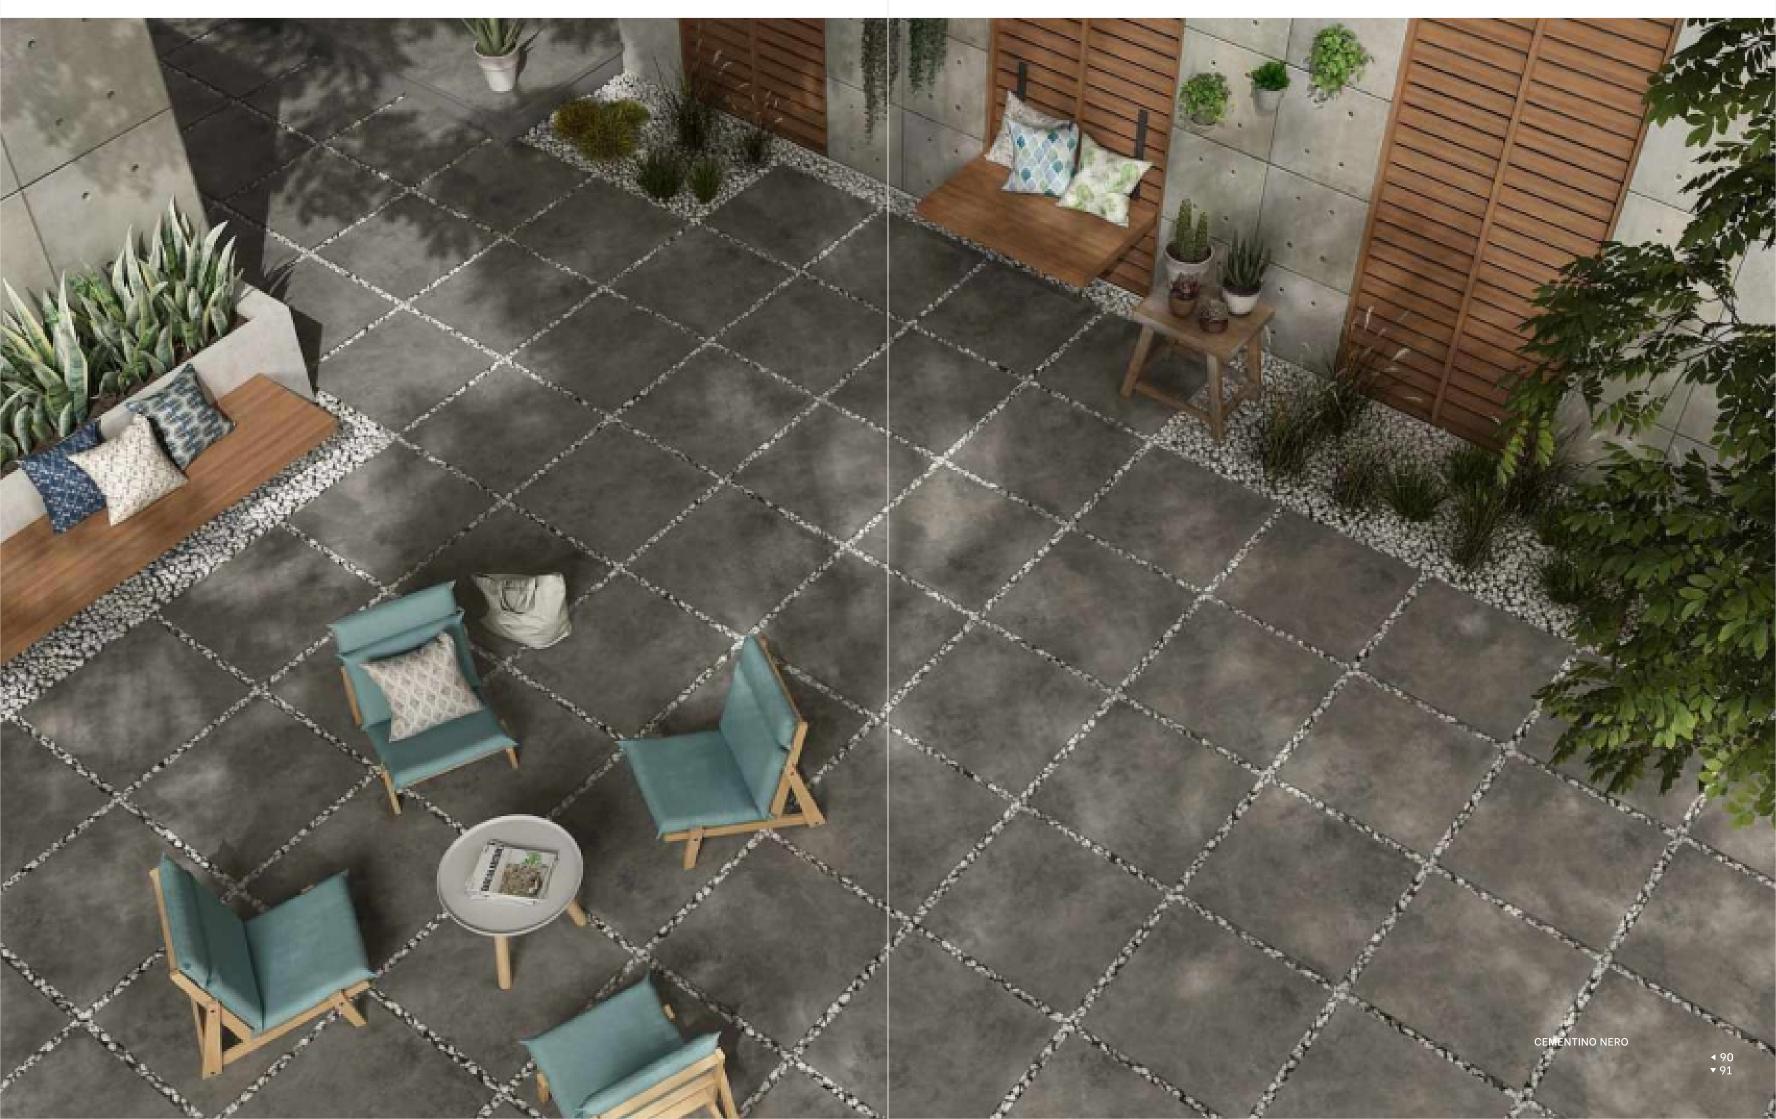












CEMENTINO BEIGE



# top notch tiles

#### CEMENTINO


#### CEMENTINO BEIGE RANDOM

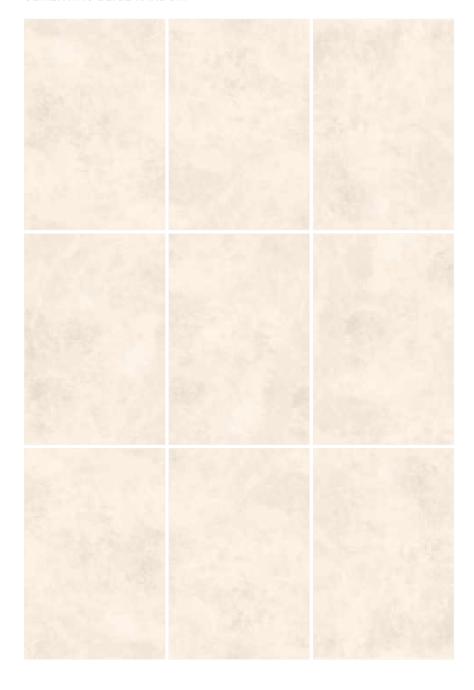

#### CEMENTINO BEIGE



600x900mm, Random - 6



600x600mm, Random - 8

#### CEMENTINO ASH



600x900mm, Random - 6




**CEMENTINO GREY** 

600x900mm, Random - 6



CEMENTINO NERO

600x900mm, Random - 6



600x600mm, Random - 8



600x600mm, Random - 8



600x600mm, Random - 8

Mix Patio Pack\_

296x 600mm










AOSTA GREY



600x900mm

600x900mm



600x600mm, Random - 3



600x600mm, Random - 3

Mix Patio Pack\_

296x 600mm




GRAVE STONE BEIGE





G R A V E S T O N E



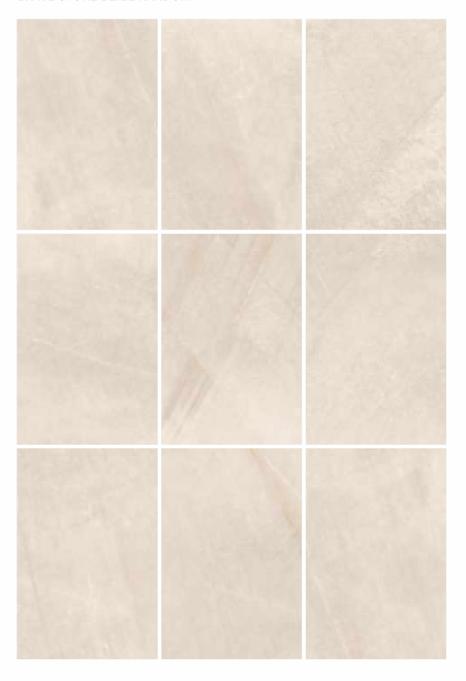

GRAVE STONE BEIGE



600x900mm, Random - 8



600x600mm, Random - 8

Mix Patio Pack\_

296x 600mm










S O U L S T O N E

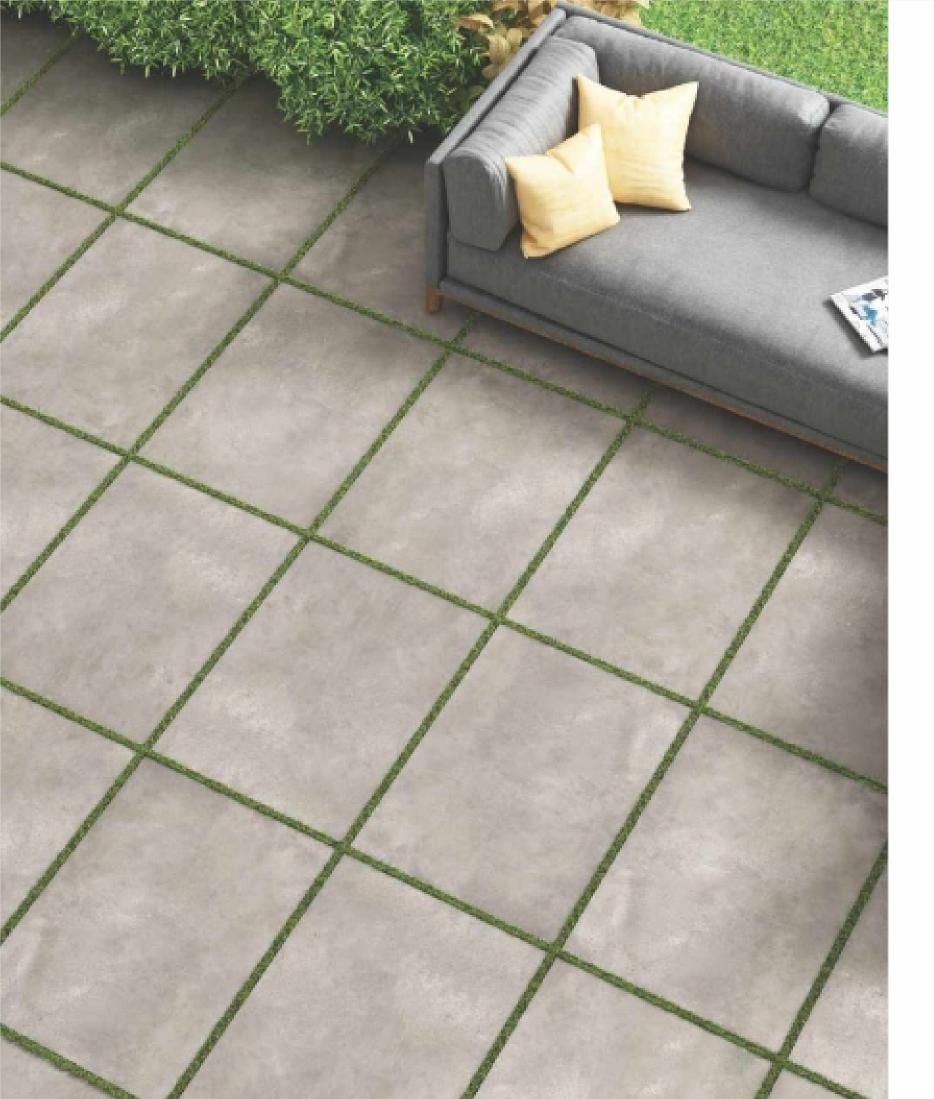

SOUL STONE GREY







SOUL STONE ASH




SOUL STONE GREY

600x900mm, Random - 4







600x600mm, Random - 5



600x600mm, Random - 5

Mix Patio Pack\_

296x 600mm













CLAY STONE NERO

600x900mm, Random - 3



600x600mm, Random - 5



600x600mm, Random - 5

Mix Patio Pack\_

296x 600mm














600x600mm, Random - 24



600x600mm, Random - 24

Mix Patio Pack\_

296x 600mm










PAVE STONE GREY

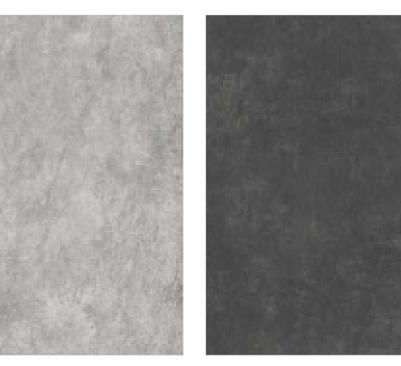

600x900mm, Random - 8



600x900mm, Random - 8

PAVE STONE NERO



600x600mm, Random - 12



600x600mm, Random - 12




600x600mm, Random - 12

Mix Patio Pack\_

296x 600mm



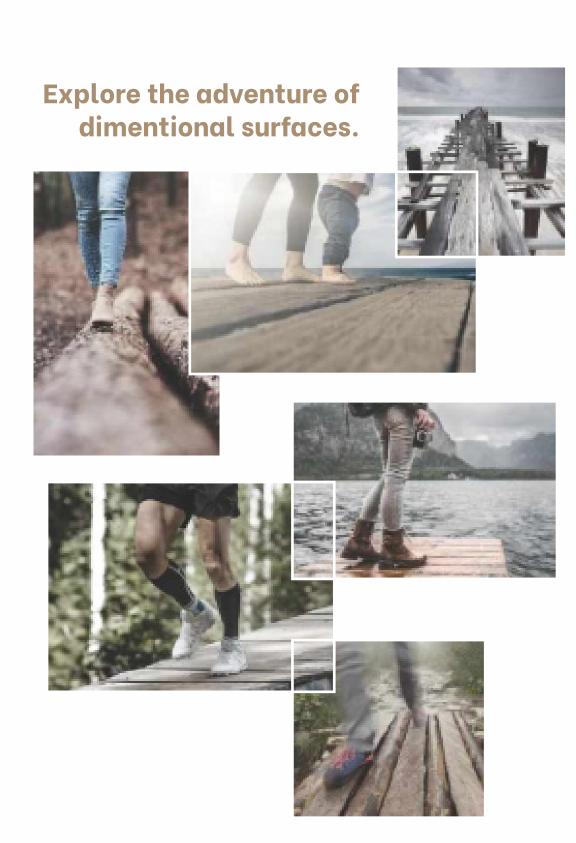








C H E R R Y W O O D








300x1200mm, Random - 10

300x1200mm, Random - 10















OAK WOOD GREY



OAK WOOD BEIGE



OAK WOOD BROWN OAK WOOD ASH





300x1200mm, Random - 6

Random - 6

OAK WOOD GREY














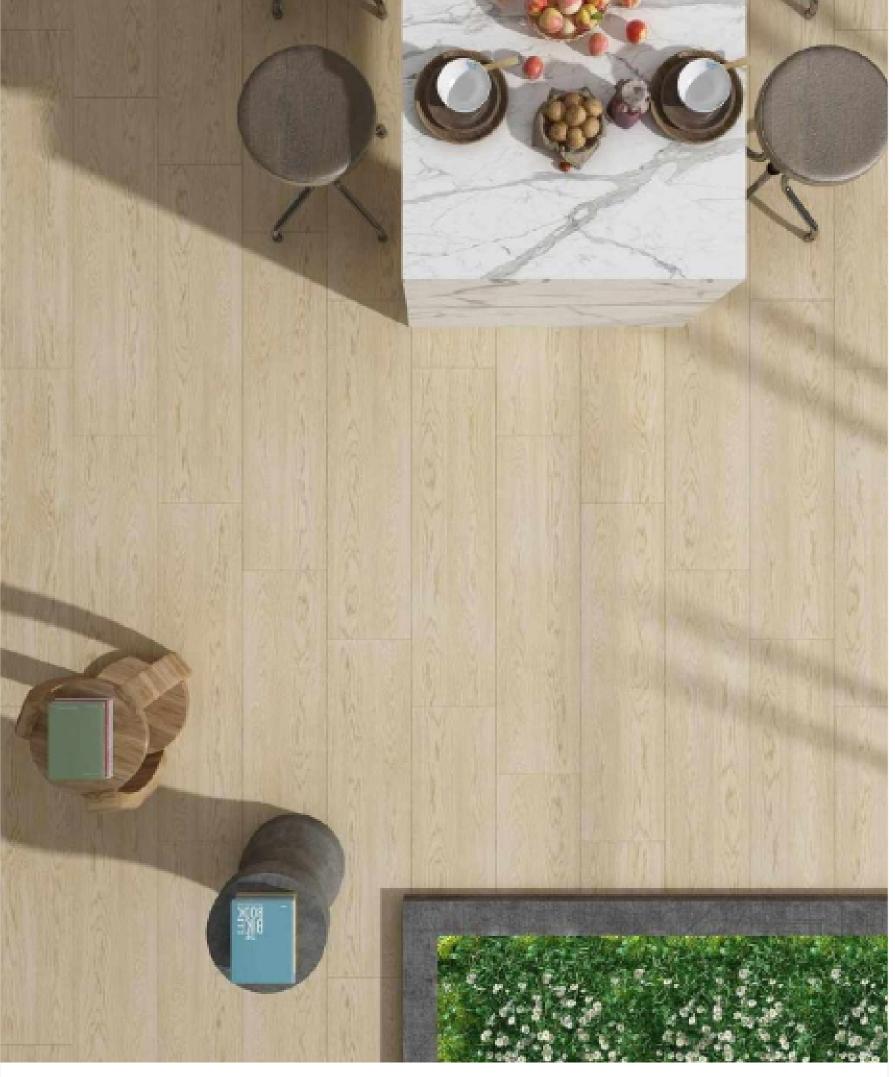

PINE BIEGE







R O V E R W O O D







ROVERWOOD NATURAL




300x1200mm, Random - 6





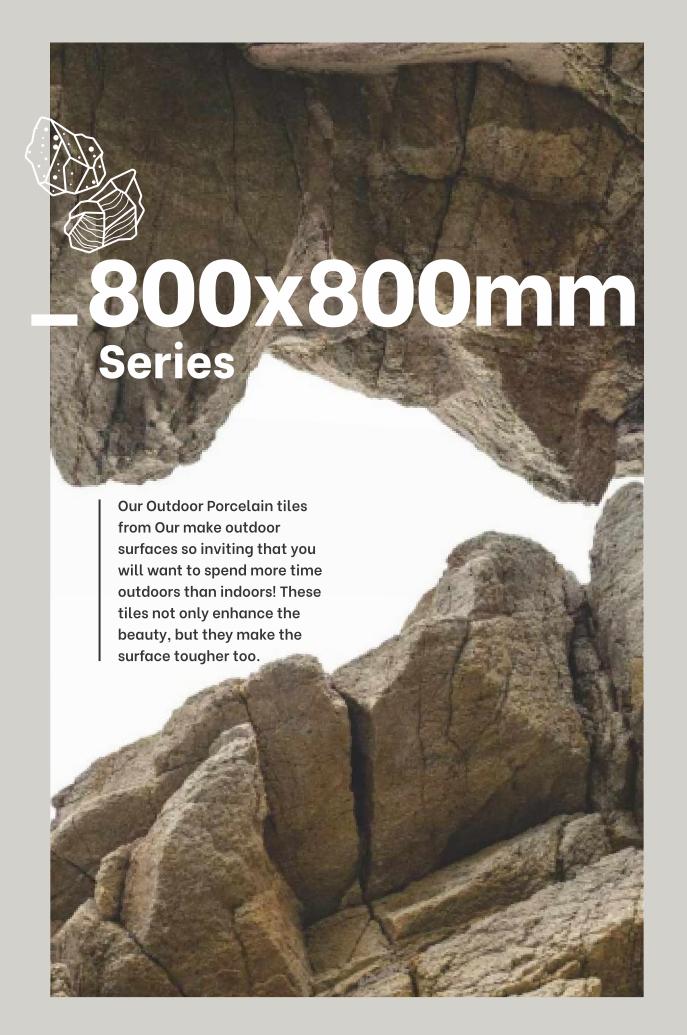

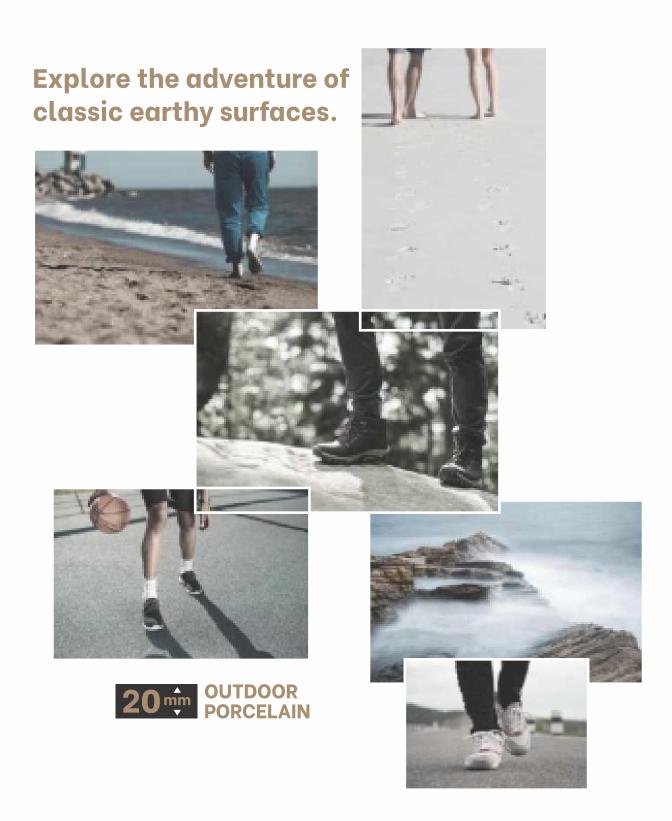








### CEMENTINO



#### CEMENTINO BEIGE




800x800mm, Random - 6

#### CEMENTINO ASH




800x800mm, Random - 6

### CEMENTINO BEIGE RANDOM

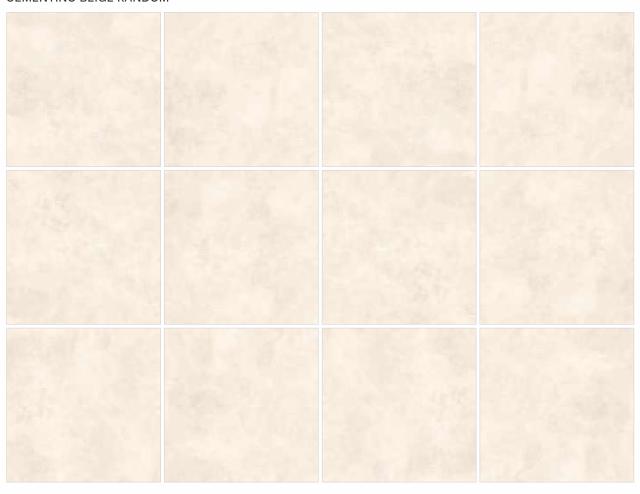


#### CEMENTINO GREY




800x800mm, Random - 6

#### CEMENTINO NERO



800x800mm, Random - 6

#### CEMENTINO NERO RANDOM

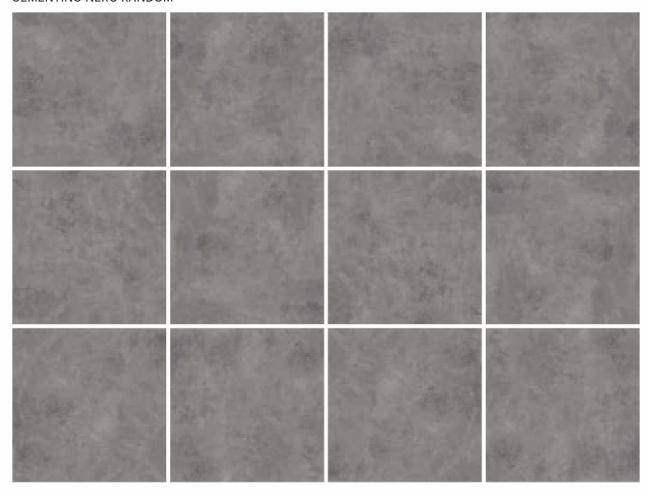









#### C O U N T R Y

#### COUNTRY CREMA



800x800mm, Random - 9

### COUNTRY CREMA RANDOM



#### COUNTRY LGY



800x800mm, Random - 9

#### COUNTRY ANTRECITE



800x800mm, Random - 9


### COUNTRY LGY RANDOM















BRASILIAN BLACK








800x800mm, Random - 23

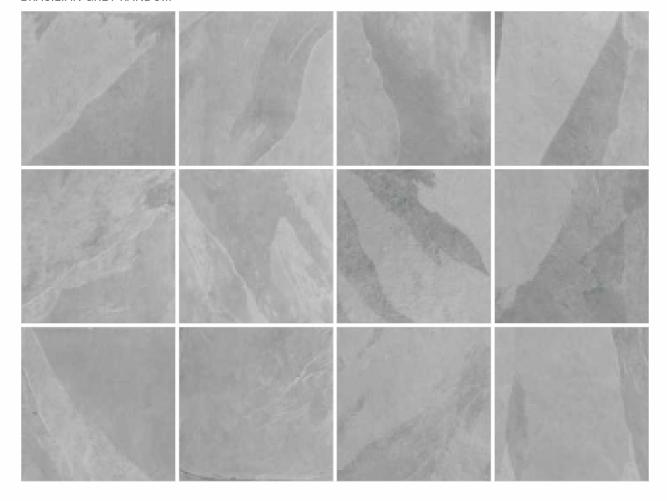



PREVIEW OF\_ BRASILIAN BLACK



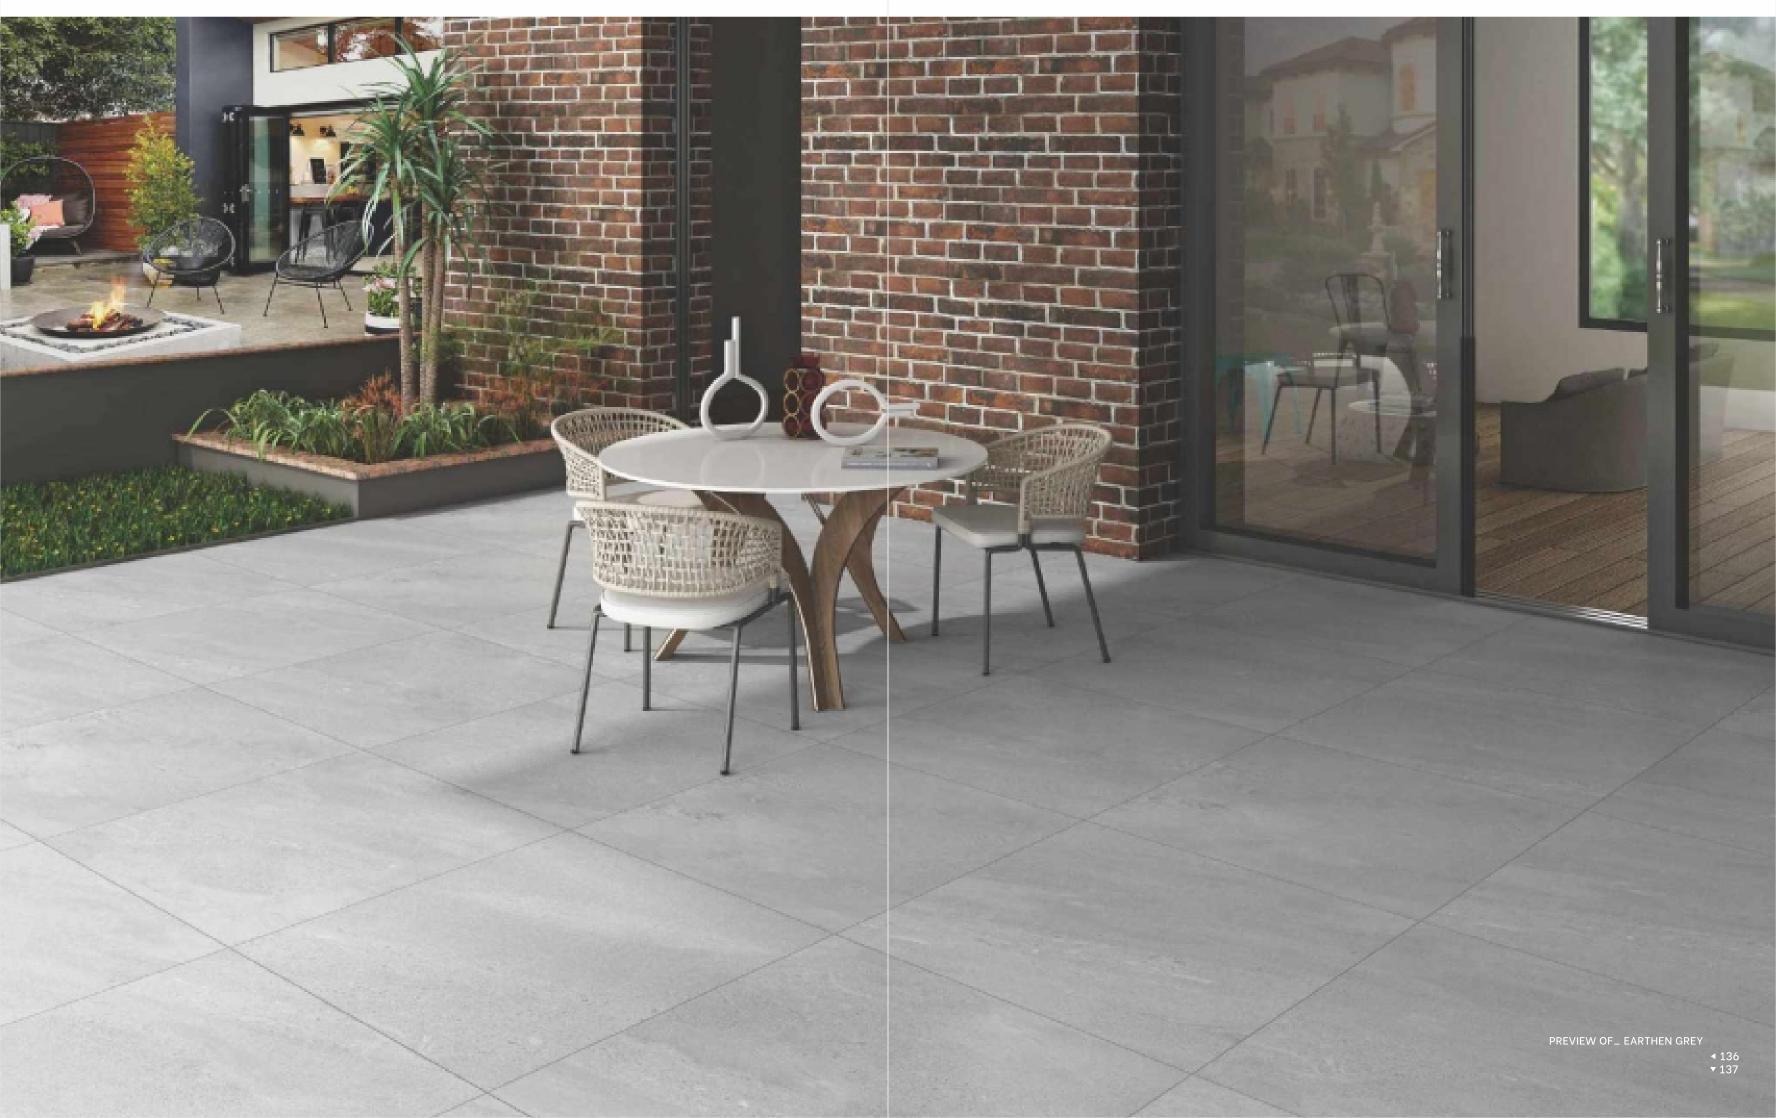






#### EARTHEN

#### EARTHEN BEIGE



800x800mm, Random - 8

#### EARTHEN GREY




800x800mm, Random - 8

### EARTHEN BEIGE RANDOM




#### EARTHEN DARK GREY




800x800mm, Random - 8

#### EARTHEN NERO



800x800mm, Random - 8

### EARTHEN DARK GREY RANDOM

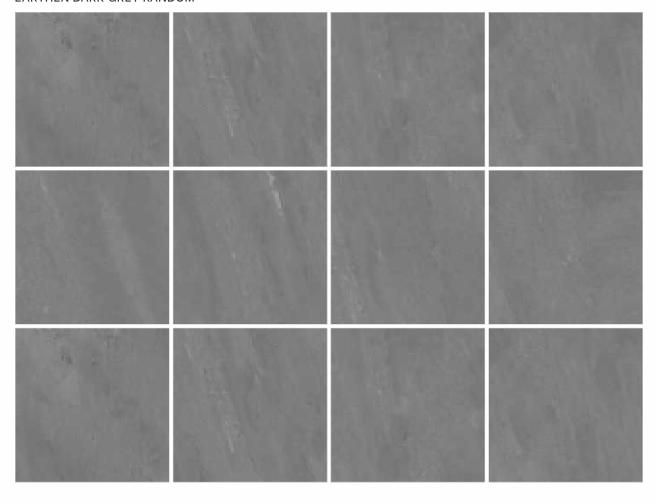

















800x800mm

### BLUE STONE COIN RANDOM

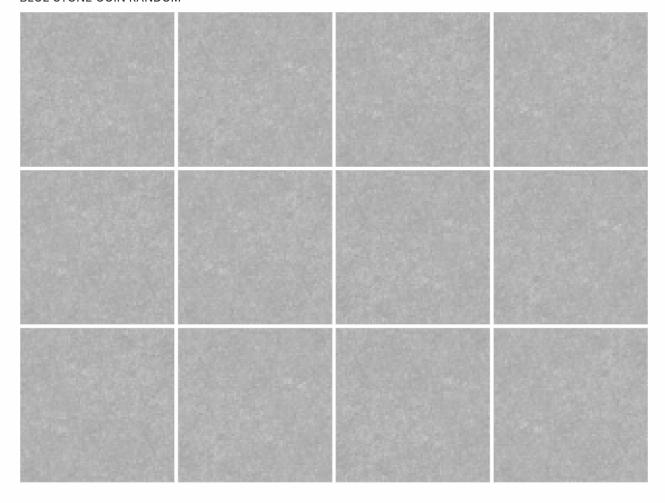



TECHNICAL CHARACTERISTICS

Following the EN 14411 (ISO 13006) norms and test cases UNI ISO 10545 appendix G for ceramic tiles dry pressed with low water absorption E≤0,5% group Bla.

Sr. No.	TEST CONDUCTED	TEST RESULTS	TEST REQUIREMENTS AS PER IS 15622 : 2006	Remarks		
1	Water absorption (% by mass)	Average: 0.17	-	Based on the results of water absorption the tested tiles conformed to Gr. B lb (0.08% ≤ 3%) of IS 15622:2006, Further test results were delivered as per requirements of Gr. B lb		
2	Modulus Of Rupture (MOR) N/mm² Span Length = 580 mm Average thickness of the tiles measured = 19.81 mm	Average : 39.0 N/MM²		Passed the test		
3	Breaking Strength (N) Span Length = 580 mm Average thickness of the tiles measured = 19.81 mm	Average : 8090.0 N	(Gr. B lb) For thickness > 7.5 mm 1200 N minimum	Passed the test		
4	Scratch Hardness Surface (Mohs' scale)	No. 7	(Gr. B lb) For commercial application 6 minimum, Home application 5 minimum	Passed the test		
5	Thermal Shock Resistance	None of the tiles as tested showed any defects on surface at the end of the 10th cycle.	(Gr. B lb) Tiles specimens should not show any visible defect when subjected to thermal shock resistance test as per test method IS 13630 : 2006 (Part 5) with immersion	Passed the test		
6	Bulk Density (gm/cc)	Average : 2.302	IS 13630 (Part 2) : 2006			
7	Co-efficient of Thermal Expansion from ambient Temperature to 100oC	L = 4.4956 (10° K¹) B = 4.6883 (10° K¹)	-	Passed the test		
8	Straightness of Sides (facial sides) The maximum deviation from straightness in percent related to the corresponding work sizes	+ 0.05 % (Max) - 0.08 % (Max)	(Gr. B lb) S > 410 cm <sup>2</sup> ± 0.1 %	Passed the test		
9	Rectagularity The maximum deviation from straightness in percent related to the corresponding work sizes	+ 0.10 % (Max) - 0.10 % (Max)	± 0.1%	Passed the test		
10	Surface Flatness The maximum deviation from flatness in percent  (a) Centre of curvature related to diagonal calculated from work size.  (b) Edge of curvature related to the corresponding work size  (c) Warpage related to the diagonal calculated from the Work Size	+ 0.17 % (Max) + 0.10 % (Max) - 0.14 % (Max) + 0.09 % (Max) - 0.06 % (Max)	± 0.2 % ± 0.2 % ± 0.2 %	Passed the test  Passed the test  Passed the test		
	Chemical resistance Five test specimens were	- 0.06 % (Max)				
	treated with following solns.  (a) Centre of curvature related to diagonal calculated from work size.	+ 0.17 % (Max)	± 0.2 %	Passed the test		
	(b) Edge of curvature related to the corresponding work size	+ 0.10 % (Max) - 0.14 % (Max)	± 0.2 %	Passed the test		
	(c) Warpage related to the diagonal calculated from the Work Size	+ 0.09 % (Max) - 0.06 % (Max)	± 0.2 %	Passed the test		
	Five test specimens were treated with following solns.					
11	1. Household Chemicals a) Ammonium Chloride soln. (100 gm/l)	No visual changes observed after immersion for 6 hrs., pencil lines removed with soft dry cloth.	"Class - AA" min.	Conformed to "Class-AA"		
11	b) Standard cleaning Agent soln., (as per procedure)	No visual changes observed after immersion for 6 hrs., pencil lines removed with soft dry cloth.	"Class - AA" min.	Conformed to "Class-AA"		
	2. Swimming pool salts a) Sodium Hypochlorite Soln. (20 mg/l)	No visual changes observed after immersion for 6 hrs., pencil lines removed with soft dry cloth.	"Class - AA" min.	Conformed to "Class-AA"		
	b) Copper Sulphate Soln. (20 mg / l)	No visual changes observed after immersion for 6 hrs., pencil lines removed with soft dry cloth.	"Class - AA" min.	Conformed to "Class-AA"		
	3. Acids a) Hydrochloric acid Soln. 3 % (v/v)	No visual changes observed after immersion for 7 days, pencil lines removed with soft dry cloth.	-	Conformed to "Class-AA"		
	b) Citric acid Soln. (200 mg / l)	No visual changes observed after immersion for 6 hrs., pencil lines removed with soft dry cloth.	-	Conformed to "Class-AA"		
	4. Alkali Potassium hydroxide soln., (200 mg / l)	No visual changes observed after immersion for 7 days, pencil lines removed with soft dry cloth.	-	Conformed to "Class-AA"		

				top notch tiles
Sr. No.	TEST CONDUCTED	TEST RESULTS	TEST REQUIREMENTS AS PER IS 15622 : 2006	Remarks
12	Skid Resistance / Surface Slip Resistance  (a) Condition of Test Surface: Tile Surface was cleaned thoroughly be wet cloth followed by dry cloth and ensured that the surface is completely clean and dryt the time of testing.  (b) Direction of Test  (1) Parallel to sides (4 Measurements)	Coefficient of friction μ  1) 0.83 2) 0.78 3) 0.77 4) 0.79	As per ISO 10545 Part – 17	-
13	Moisture expansion in (mm / mtr.)	0.00	Passed the test	-
14	Skid Resistance/ Surface Slip Resistance BS EN Standard specification EN:14411:2016 ( Group Bla)	-	R-11	R-11

## PACKING DETAILS (OUTDOOR)

SIZE	WEIGHT/ BOX (KG)	PIC/BOX	WEIGHT/ PLT (KG)	BOXES/ PLT	PLT/CTN	BOXES/ CTN	MT <sup>2</sup> /BOX	MT²/PLT	MT <sup>2</sup> /CTN	WIGHT/CTN
600x900mm (20mm)	24.5	1	30	40	28	1120	0.54	21.6	604.8	28280
800x800mm (20mm)	58.5	2	30	18	26	468	1.28	23.04	599.04	28158
600x600mm (20mm)	32.75	2	30	32	26	832	0.72	23.04	599.04	28028
300x1200mm	33	33 2	30	42	12	804	0.71	29.82	570.84	27192
(20mm)			30	30	10			21.3		

## PACKING DETAILS (PATIOPACK)

SIZE	PCS/ CRAT	M2/PCS	SQFT/ PCS	Mt²/ CRATE	SQFT/ CRATE	IN KGS/ CRATE	CRATE/ CTN	CRATE/ CTN	IN KGS/ PLT	IN KGS/ CTN	
600x900mm (20mm)	13	0.54	5.81	7.02	75.56	530.40	532.71				
600x600mm (20mm)	13	0.36	3.88	4.68	50.38	235.76		500.74		700	04000
296x600mm (20mm)	13	0.18	1.94	2.31	25.18	58.14		36	730	26280	
296x296mm (20mm)	9	0.09	0.79	0.79	7.10	5.60					
	48			14.80	158.21	829.89	532.71	36.00	730.00	26280.00	



- Opp. Hotel Excellency, Nr, Rachna Society, Deesa-palanpur Highway, Deesa - 385535, Gujarat.
- (+91) 9574191183
- www.topnotchtiles.com